

CALYPSO Outdoor
3-731-xx

oxygen

FIXTURE TYPE _____


LOCATION _____

PROJECT _____

DATE _____



-16 Gray



-22 Oiled Bronze

LIGHT SOURCE 2 x 10.1W LED, 3000K, CRI 90

LUMINAIRE POWER 24.1W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: 1015 lm (LM-79)

INPUT VOLTAGE 120V to 277V AC, 50/60Hz

DRIVER OUTPUT 700mA, 29.4W max power

DIMMING TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 1% current output


CONSTRUCTION Cast Aluminum and Polycarbonate

DIFFUSER - White Polycarbonate

FINISHES Gray (-16), Oiled Bronze (-22)

MOUNTING 4" Octagonal J-Box*,
4" Square J-Box* with a single device mud ring**
*Deep J-Box (Required to house driver)
**Mud ring must be mounted horizontally
(Installer must provide a bead of caulk between fixture housing and mounting surface)

STANDARDS UL Wet listed, ADA Compliant, Conforms to UL STD 1598,
Certified CAN/CSA STD C22.2 No 250.0.

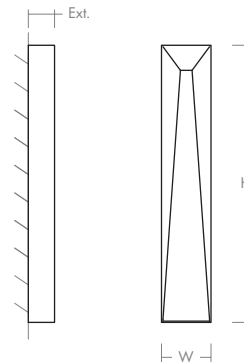

DIMENSIONS

W: 4.25"
H: 22.00"
Ext: 2.25"
M.C: 11.00" From top of fixture

Order example for standard fixture:

3-731-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-731-2722**

27: 2700K, 35: 3500K, 40: 4000K

