

RICKIE Outdoor
3-747-xx


oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____

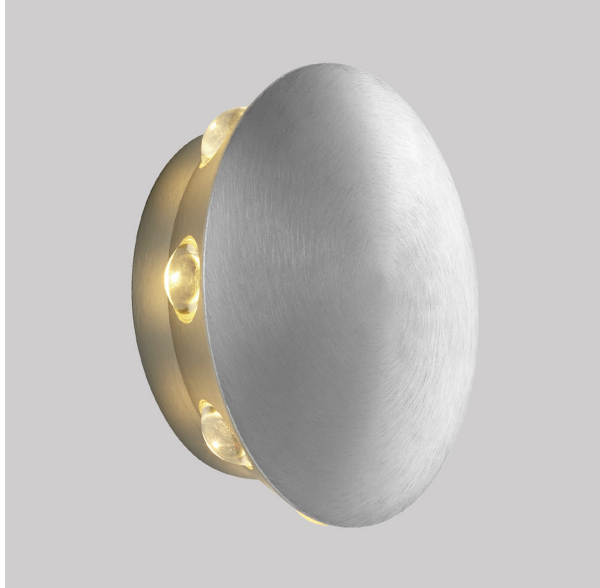

-16 Brushed Aluminum



-15 Black

LIGHT SOURCE LED Arrays, 3000K, CRI 90

LUMINAIRE POWER 12W at 120V

RATED LIFE 50000 hr RL

OPTIONAL COLOR TEMPERATURES 3000K Only

LUMEN OUTPUT To Be Determined

INPUT VOLTAGE 100V to 277V AC, 50/60Hz

DRIVER OUTPUT 450mA, 18W max power

DIMMING Non-dimmable


CONSTRUCTION Cast Aluminum Housing

DIFFUSER - Clear Glass

FINISHES Black (-15), Brushed Aluminum (-16)

MOUNTING 4" Octagonal J-Box
(Installer must provide a bead of caulk between fixture housing and mounting surface)

STANDARDS ETL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

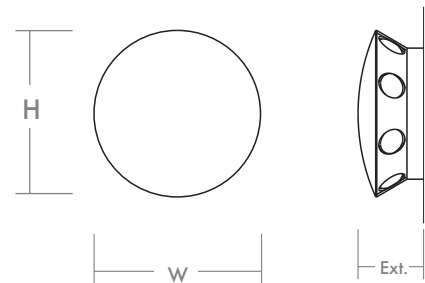

DIMENSIONS

W: 6.25"

H: 6.25"

Ext: 2.75"

M.C: 3.125" From top of fixture

Order example for standard fixture:

3-747-15 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

