

CORNET Pendant

3-651-xxxx


oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-2018 Coffee Ombre Glass/
Gunmetal - 14 Clear Glass/Polished
Chrome - 1314 Smoked Ombre Glass/
Polished Chrome

LIGHT SOURCE 1 x 6.1W LED, 3000K, CRI 90
LUMINAIRE POWER 7.2W at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: 399 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 180mA, 7.6W max power
DIMMING TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 1% current output
CONSTRUCTION Plated Steel and Glass
**DIFFUSER/
METAL FINISHES** (-14) Clear Glass/Polished Chrome
(-1314) Smoked Ombre Glass/Polished Chrome
(-2018) Coffee Ombre Glass/Gunmetal
MOUNTING 4" Octagonal J-Box*,
4" Square J-Box* with a single device mud ring
*Deep J-Box (Required to house driver)
STANDARDS UL Dry/Damp listed, Conforms to UL STD 1598,
Certified CAN/CSA STD C22.2 No 250.0.

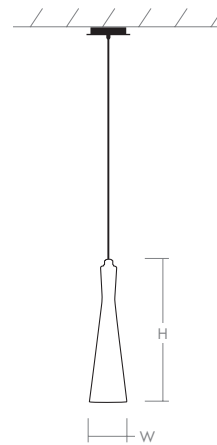

DIMENSIONS
Dia. Canopy: 5.75"
Dia. Fixture: 4.25"
H. Fixture: 17.25"
 Supplied with 10 ft braided cord

Order example for standard fixture:
3-651-2018 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)
 3: 120V to 277V
 Order example for optional color temperatures: **3-651-272018**
 27: 2700K, 35: 3500K, 40: 4000K

