

MAGNETA Pendant
3-607-xxx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-40 Aged Brass



-14 Polished Chrome



-24 Satin Nickel

Diffusers:




-1 White Opal Glass



- Matte White Acrylic

LIGHT SOURCE	1 x 6.2W LED, 3000K, CRI 90
LUMINAIRE POWER	6.59W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: (-1) Glass: 230 lm (LM-79) Acrylic: 233 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	180mA, 7.6W max
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
CONSTRUCTION	Plated Steel and Acrylic or Glass
METAL FINISHES/ DIFFUSER	(-114) White Opal Glass / Polished Chrome (-124) White Opal Glass / Satin Nickel (-140) White Opal Glass / Aged Brass (-14) Matte White Acrylic / Polished Chrome (-24) Matte White Acrylic / Satin Nickel (-40) Matte White Acrylic / Aged Brass
MOUNTING	4" Octagonal J-Box*, 4"x4" J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

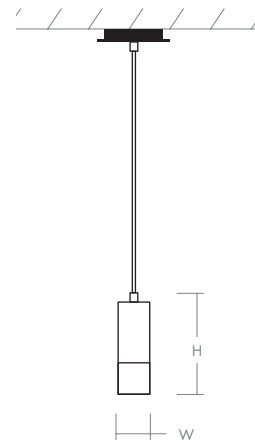

DIMENSIONS

Dia. Canopy: 5.88"

Dia Fixture: 2.50"

H. Fixture: 8.08"

Supplied with 8 ft braided cord

Order example for standard fixture:

3-607-124 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-607-27124**

27: 2700K, **35:** 3500K, **40:** 4000K

