

NEBULA Pendant
3-680-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-40 Aged Brass (Lit)




-15 Black



-24 Satin Nickel

LIGHT SOURCE	(5x) 6W LED Arrays with Driver on board, 3000K, CRI 90
LUMINAIRE POWER	31 W at 120V
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: TBD lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	N/A
DIMMING	TRIAC and ELV Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- 6" White Opal Glass
FINISHES	Black (-15), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

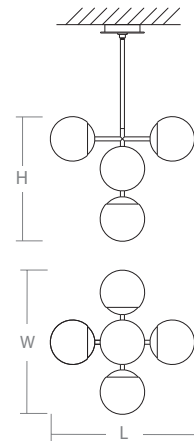

DIMENSIONS

Dia. Canopy: 4.75"/5.91" Disk
W. Fixture: 19.375"
H. Fixture: 16.75"
 Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height

Order example for standard fixture:
3-680-15 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

