

SIGMA Pendant
3-6204-xx

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-24 Satin Nickel

-22 Oiled Bronze

-25 Satin Copper

- LIGHT SOURCE** 1 x 24W LED max. Medium Base PAR20/30/38;
Medium Base A19, A21.
(Lamp not included)
- LUMINAIRE POWER** To be determined
- RATED LIFE** See LED bulb manufacturer specification
- LUMEN OUTPUT** Delivered: To be determined
- INPUT VOLTAGE** 120V
- DRIVER OUTPUT** No
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER** - White Tiffany Glass
- FINISHES** Oiled Bronze (-22), Satin Nickel (-24), Satin Copper (-25)
- MOUNTING** 4" Octagonal J-Box
- STANDARDS** ETL Dry/Damp listed, Conforms to UL STD 1598,
Certified CAN/CSA, STD C22.2 No 250.0.

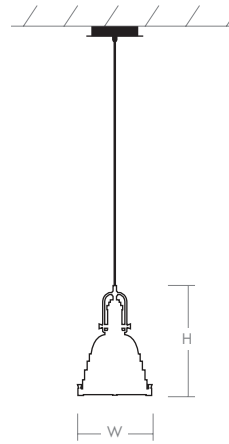

DIMENSIONS
Dia. Canopy: 6.50"
Dia. Fixture: 13.50"
H. Fixture: 18.25"
Suspension Length: Up to 60"

Order example for standard fixture:
3-6204-24 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120v

