

JOURNEY Wall Sconce / Ceiling Mount
3-625-xx-EM


oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-24 Satin Nickel

LIGHT SOURCE 1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER 12.9W at 120V
RATED LIFE 60000 hr RL
LUMEN OUTPUT Delivered: 698 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 350mA, 14.7W
DIMMING TRIAC and ELV dimming at 120V AC;
 0-10V dimming, 100% to 10% current output
CONSTRUCTION Plated Steel and Acrylic
DIFFUSER - Matte White Acrylic
FINISHES Satin Nickel (-24)
MOUNTING 4" Octagonal J-Box
STANDARDS ETL Dry/Damp listed, Conforms to UL STD 1598,
 Certified CAN/CSA, STD C22.2 No 250.0.

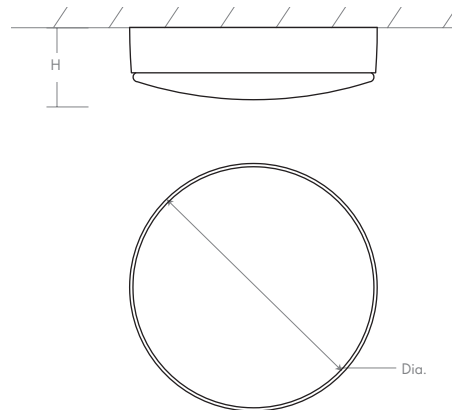

DIMENSIONS
Dia: 14.00"
H: 4.10"

EM Driver Fullham HotspotLED Series
EM Battery Life 90 Minutes Minimum

Order example for standard fixture:
3-625-24-EM (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V to 277V

