

**BEACON Wall Sconce**  
**3-587-xxx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-95 Old World



-24 Satin Nickel

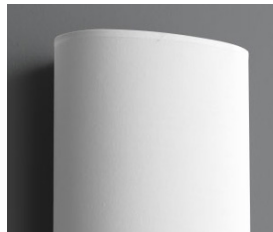


-1 White Cotton



-2 Matte White Acrylic

<b>LIGHT SOURCE</b>	1 x 10.1W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	12.4W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: (-1) Fabric: 668 lm (LM-79) (-2) Acrylic: 441 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V to 277V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	350mA, 14.7W max power
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
<b>CONSTRUCTION</b>	Plated Steel and Acrylic /or Fabric
<b>DIFFUSER/ METAL FINISHES</b>	(-124) White Cotton / Satin Nickel (-195) White Cotton / Old World (-224) Matte White Acrylic / Satin Nickel (-295) Matte White Acrylic / Old World
<b>MOUNTING</b>	4" Octagonal J-Box* *Deep J-Box (Required to house driver)
<b>STANDARDS</b>	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

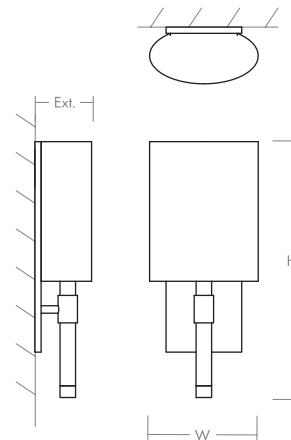

**DIMENSIONS**

<b>W:</b>	<b>7.00"</b>
<b>H:</b>	<b>16.50"</b>
<b>Ext:</b>	<b>3.75"</b>
<b>M.C:</b>	<b>4.50" From top of fixture</b>

Order example for standard fixture:  
**3-587-124** {x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish}  
**3:** 120V to 277V  
 Order example for optional color temperatures: **3-587-27124**  
**27:** 2700K, **35:** 3500K, **40:** 4000K

