

ELEMENTS Wall Sconce
3-5110-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-14 Polished Chrome



-24 Satin Nickel

LIGHT SOURCE	1 x 7W Max LED GU10 Base (Lamp not included)
LUMINAIRE POWER	6.97W at 120V
RATED LIFE	See LED bulb manufacturer specification
LUMEN OUTPUT	Delivered: 457 lm (LM-79)
INPUT VOLTAGE	120V
DRIVER OUTPUT	No
CONSTRUCTION	Plated Steel and Glass
DIFFUSER	- White Opal Glass
FINISHES	Polished Chrome (-14), Satin Nickel (-24)
MOUNTING	2"x3" J-Box, 4"x4" J-Box with a single device mud ring
STANDARDS	ETL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

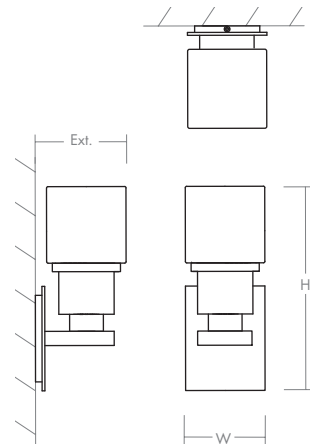

DIMENSIONS

- W:** 3.50"
- H:** 9.00"
- Ext:** 4.00"
- M.C:** 6.70" From Top of Fixture

Order example for standard fixture:
3-5110-24 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V

