

ELEMENTS Wall Sconce
3-5120-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-24 Satin Nickel



-14 Polished Chrome

- LIGHT SOURCE** 1 x 7W Max LED GU10 Base (Lamp not included)
- LUMINAIRE POWER** 7.04W at 120V
- RATED LIFE** See LED bulb manufacturer specification
- LUMEN OUTPUT** Delivered: 450 lm (LM-79)
- INPUT VOLTAGE** 120V
- DRIVER OUTPUT** No
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER** - White Opal Glass
- FINISHES** Polished Chrome (-14), Satin Nickel (-24)
- MOUNTING** 2"x3" J-Box, 4"x4" J-Box with a single device mud ring
- STANDARDS** ETL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

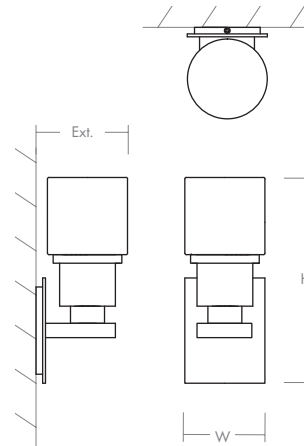

- DIMENSIONS**
- W:** 3.50"
 - H:** 9.00"
 - Ext:** 4.00"
 - M.C:** 6.70" From Top of Fixture

Order example for standard fixture:
3-5120-24 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V

