

EPOCH Wall Sconce
3-564-xxx



FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-40 Aged Brass




-22 Oiled Bronze




-24 Satin Nickel

Diffusers:

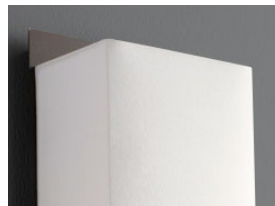


-1 White Cotton

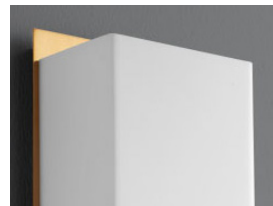

-2 Matte White Acrylic

- LIGHT SOURCE** 1 x 10.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 12.4W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: (-1) Fabric: 766 lm (LM-79)
(-2) Acrylic: TBD lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 350mA, 14.7W max power
- DIMMING** TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Acrylic /or Fabric
- DIFFUSER/
METAL FINISHES** (-122) White Cotton / Oiled Bronze
(-124) White Cotton / Satin Nickel
(-140) White Cotton / Aged Brass
(-222) Matte White Acrylic / Oiled Bronze
(-224) Matte White Acrylic / Satin Nickel
(-240) Matte White Acrylic / Aged Brass
- MOUNTING** 4" Octagonal J-Box*
*Deep J-Box (Required to house driver)
- STANDARDS** UL Dry/Damp listed, ADA Compliant, Conforms to
UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

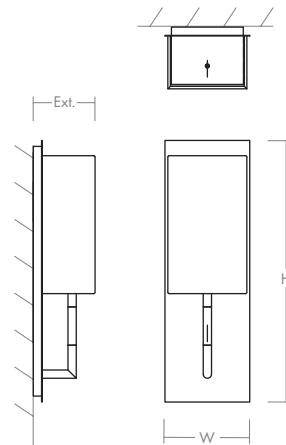

DIMENSIONS

- W:** 5.25"
- H:** 15.75"
- Ext:** 3.75"
- M.C:** 6.42" From top of fixture

Order example for standard fixture:
3-564-224 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)
3: 120V to 277V
 Order example for optional color temperatures: **3-564-27224**
27: 2700K, **35:** 3500K, **40:** 4000K

