

**MAGNETA Wall Sconce**  
**3-528-xxx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-24 Satin Nickel



-40 Aged Brass

Diffusers:





-1 White Opal Glass



Matte White Acrylic

<b>LIGHT SOURCE</b>	1 x 12.1W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	14.7W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: (-1) Glass: 690 lm (LM-79) Acrylic: 735 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V to 277V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	350mA, 14.7W max power
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
<b>CONSTRUCTION</b>	Plated Steel and Acrylic /or Glass
<b>DIFFUSER/ METAL FINISHES</b>	(-124) White Opal Glass / Satin Nickel (-140) White Opal Glass / Aged Brass (-24) Matte White Acrylic / Satin Nickel (-40) Matte White Acrylic / Aged Brass
<b>MOUNTING</b>	2" x 3" J-Box, 4" Octagonal J-Box, 4" Square J-Box with a single device mud ring
<b>STANDARDS</b>	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

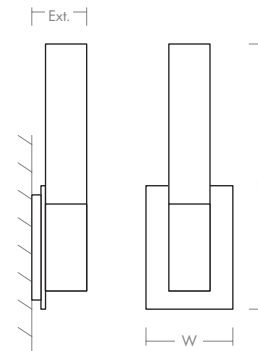

**DIMENSIONS**

<b>W:</b>	<b>4.75"</b>
<b>H:</b>	<b>14.375"</b>
<b>Ext:</b>	<b>3.25"</b>
<b>M.C:</b>	<b>11.00" From top of fixture</b>

Order example for standard fixture:

**3-528-124** (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)  
3: 120V to 277V

Order example for optional color temperatures: **3-528-27124**  
27: 2700K, 35: 3500K, 40: 4000K

