

MIZAR Wall Sconce
3-550-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-24 Satin Nickel




-22 Oiled Bronze



-40 Aged Brass

- LIGHT SOURCE** 1 x 10.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 13.0W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 627 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 350mA, 14.7W max
- DIMMING** TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 10% current output
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
- MOUNTING** 4" Octagon J-Box*, 4"x4" J-Box* with a single device mud ring**
*Deep J-Box (Required to house driver)
**Mud ring must be mounted horizontally
- STANDARDS** UL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598,
Certified CAN/CSA, STD C22.2 No 250.0.

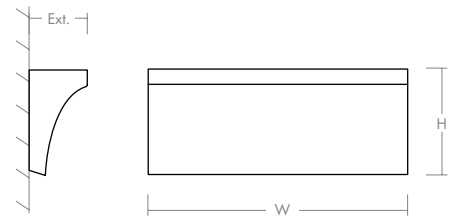

DIMENSIONS

- W:** 12.00"
- H:** 4.88"
- Ext:** 2.69"
- M.C:** 2.34" From top of fixture

Order example for standard fixture:

3-550-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-550-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

