

ORION Wall Sconce
3-540-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____


DATE _____



-24 Satin Nickel




-14 Polished Chrome



-40 Aged Brass

| | |
|------------------------------------|---|
| LIGHT SOURCE | 1 x 12.1W LED, 3000K, CRI 90 |
| LUMINAIRE POWER | 14.7W at 120V |
| RATED LIFE | 60000 hr RL |
| OPTIONAL COLOR TEMPERATURES | 2700K, 3500K, 4000K |
| LUMEN OUTPUT | Delivered: 926 lm (LM-79) |
| INPUT VOLTAGE | 120V to 277V AC, 50/60Hz |
| DRIVER OUTPUT | 350mA, 14.7W max power |
| DIMMING | TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output |
| CONSTRUCTION | Plated Steel and Acrylic |
| DIFFUSER | - Matte White Acrylic |
| FINISHES | Polished Chrome (-14), Satin Nickel (-24), Aged Brass (-40) |
| MOUNTING | 4" Square J-Box*, 4" Square J-Box* with a single device mud ring** *Deep J-Box (Required to house driver) **Mud ring must be mounted horizontally |
| STANDARDS | UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0. |

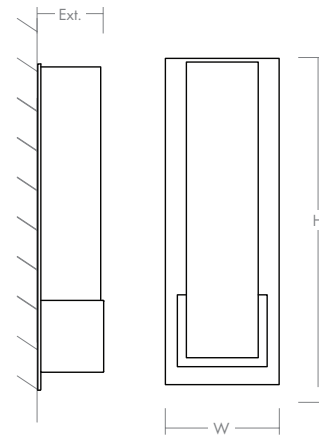

DIMENSIONS

| | |
|-------------|-----------------------------------|
| W: | 4.75" |
| H: | 13.50" |
| Ext: | 2.75" |
| M.C: | 10.78" From top of fixture |

Order example for standard fixture:

3-540-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-540-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

