

PATHWAYS Wall Sconce
3-523-2xx-EM



FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-95 Old World




-24 Satin Nickel

Diffusers:



-2 Matte White Acrylic

LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	12.9W at 120V
RATED LIFE	60000 hr RL
LUMEN OUTPUT	Delivered: 851 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
CONSTRUCTION	Plated Steel and Acrylic
METAL FINISH / DIFFUSER	(-224) Matte White Acrylic / Satin Nickel (-295) Matte White Acrylic / Old World
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

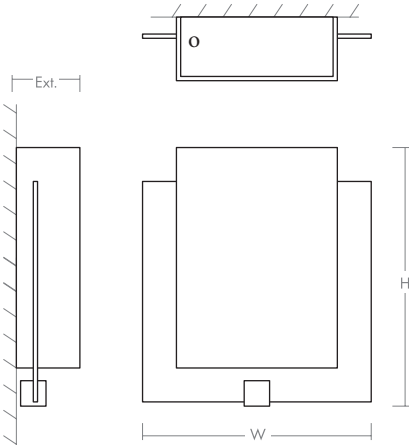

DIMENSIONS

W:	13.63"
H:	14.89"
Ext:	3.75"
M.C:	6.41" From top of fixture

EM Driver Fullham HotspotLED Series
EM Battery Life 90 Minutes Minimum

Order example for standard fixture:
3-523-224-EM (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)
 3: 120V to 277V

