

POLARIS Wall Sconce
3-522-xx-EM

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-24 Satin Nickel

LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	15.4W at 120V
RATED LIFE	60000 hr RL
LUMEN OUTPUT	Delivered: 1043 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

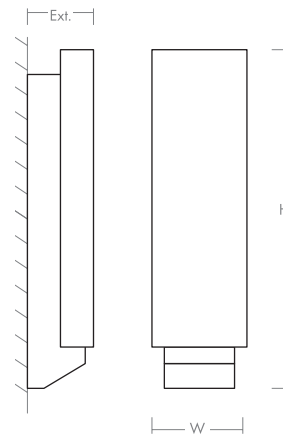

DIMENSIONS

W:	5.75"
H:	20.50"
Ext:	4.00"
M.C.:	11.25" From top of fixture

EM Driver	Fullham HotspotLED Series
EM Battery Life	90 Minutes Minimum

Order example for standard fixture:
3-522-24-EM (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V to 277V

