

SIREN Wall Sconce
3-563-xxx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-14 Polished Chrome



-24 Satin Nickel

Diffusers:




-1 White Opal Glass



-2 Matte White Acrylic

- LIGHT SOURCE** 1 x 10.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 12.3W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: (-1) Glass: 980 lm (LM-79)
(-2) Acrylic: 1006 lm (LM-79)
- INPUT VOLTAGE** 120V TO 277V AC, 50/60Hz
- DRIVER OUTPUT** 350mA, 14.7W max power
- DIMMING** TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Acrylic /or Glass
- DIFFUSER / METAL FINISHES** (-114) White Opal Glass / Polished Chrome
(-124) White Opal Glass / Satin Nickel
(-214) Matte White Acrylic / Polished Chrome
(-224) Matte White Acrylic / Satin Nickel
- MOUNTING** 4" Octagonal J-Box
- STANDARDS** UL Dry/Damp listed, ADA Compliant, Conforms to
UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0

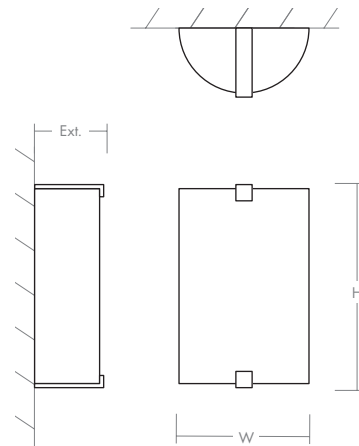

DIMENSIONS

- W:** 7.75"
- H:** 12.50"
- Ext:** 4.00"
- M.C:** 6.30" From top of fixture

Order example for standard fixture:
3-563-124 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)
 3: 120V to 277V
 Order example for optional color temperatures: **3-563-27124**
 27: 2700K, 35: 3500K, 40: 4000K

