

SONGBIRD Wall Sconce
3-589-xxx

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-14 Polished Chrome



-24 Satin Nickel



-1 White Opal Glass



-2 Matte White Acrylic



-6 Silver Cloth Acrylic

LIGHT SOURCE 1 x 10.1W LED, 3000K, CRI 90

LUMINAIRE POWER 13.3W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: (-1) Glass: 1007 lm (LM-79)
 (-2) Acrylic: 983 lm (LM-79)
 (-6) Acrylic: 553 lm (LM-79)


INPUT VOLTAGE 120V to 277V AC, 50/60Hz

DRIVER OUTPUT 350mA, 14.7W

DIMMING TRIAC and ELV dimming at 120V AC;
 0-10V dimming, 100% to 10% current output

CONSTRUCTION Plated Steel and Acrylic

DIFFUSER / METAL FINISHES (-114) White Opal Glass / Polished Chrome
 (-124) White Opal Glass / Satin Nickel
 (-214) Matte White Acrylic / Polished Chrome
 (-224) Matte White Acrylic / Satin Nickel
 (-614) Silver Cloth Acrylic / Polished Chrome
 (-624) Silver Cloth Acrylic / Satin Nickel

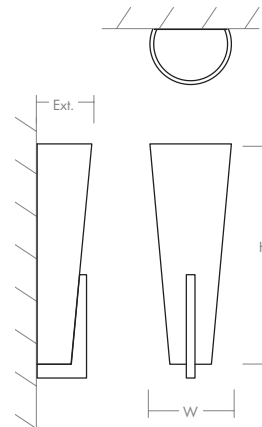

DIMENSIONS
W: 5.88"
H: 17.00"
Ext: 4.00"
M.C: 6.50" From top of fixture

MOUNTING 4" Octagonal J-Box

STANDARDS ETL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

Order example for standard fixture:
3-589-624 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)
3: 120V to 277V
 Order example for optional color temperatures: **3-589-27624**
27: 2700K, **35:** 3500K, **40:** 4000K

