

TEMPUS Wall Sconce
3-5000-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-24 Satin Nickel



-15 Black




-20 Polished Nickel



-40 Aged Brass

- LIGHT SOURCE** 1 x 9W LED, 3000K, CRI 90
- LUMINAIRE POWER** 11.3W at 120V
- RATED LIFE** 60000 hr RL
- LUMEN OUTPUT** Delivered: 687 lm (LM-79)
- INPUT VOLTAGE** 120V, 60Hz
- DRIVER OUTPUT** 350mA, 15W max
- DIMMING** TRIAC Dimming
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Black (-15), Polished Nickel (-20), Satin Nickel (-24), Aged Brass (-40)
- MOUNTING** 4" Octagonal J-Box*
4"x4" Square J-Box* with single device mud ring
*Deep J-Box (Required to house driver)
- STANDARDS** ETL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

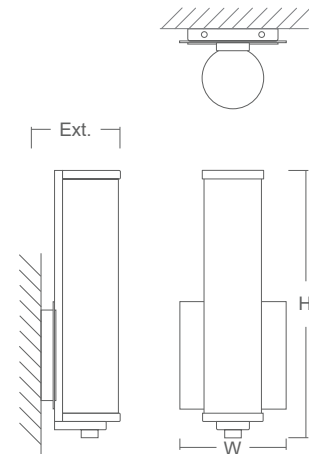

DIMENSIONS
W: 5.125"
H: 12.75"
Ext: 4.00"
M.C: 8.75" From Top of Fixture

Order example for standard fixture:
3-5000-xx (x-Voltage - xxx-Sequence # - xx-Finish)

