


**TRADITIONAL HIGHBAY**

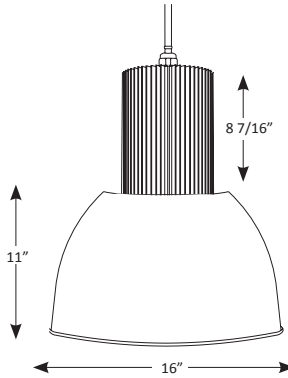

**LED MODULE** Bridgelux diode with a 3 step MacAdams ellipse

**THERMAL MANAGEMENT** The fixture is designed with a special passive heat sink to keep it running well below specifications. This ensures long life in excess of 50,000 hours.

**OPTICAL SYSTEM** 3.25" diameter aluminized reflectors are over 89% efficient and are interchangeable with a snap on connector.

**CONSTRUCTION** Extruded aluminum heat sink  
20', 3 wire cord cuttable in the field

**ELECTRICAL** The LED driver is mounted in a surface canopy or remote enclosure. 0-10 V dimming is standard

**LISTING** UL for US and Canada, Suitable for listed damp location

**WARRANTY** 5 Year Full Warranty

**DIMMING** Dimming capabilities to dim down to 1% \*.  
0-10V dimming

**VOLTAGE** 120~277V


**LUMEN OUTPUT** Provides 12,440 lumens, 132.5 LPW  
Consult IES files for specific lumen values  
(available at [www.chameleonltg.com](http://www.chameleonltg.com))

**BUILD YOUR PRODUCT**



Grayed areas are codes for creating your lighting catalog #

EXAMPLE CATALOG # HBV2-16-AR-P59/P59-S-CORD-S-LED94-30-8-R64/DE-S-P59-94

STYLE	SIZE	REFELCTOR	LIGHT SOURCE
<input type="checkbox"/> HBV2	<input type="checkbox"/> 16	<input type="checkbox"/> AR Acrylic	<input type="checkbox"/> P59



LIGHT SOURCE	FINISH	MOUNTING	CORD COLOR	WATTAGE (WATTS)	COLOR TEMP.	CRI	BEAM SPREAD
<input type="checkbox"/> P59	<input type="checkbox"/> S Silver	<input type="checkbox"/> Cord	<input type="checkbox"/> S Silver	<input type="checkbox"/> LED94 94 watts	<input type="checkbox"/> 30 3000 <input type="checkbox"/> 35 3500 <input type="checkbox"/> 40 4000	<input type="checkbox"/> 8 80	<input type="checkbox"/> R39 39 Degree <input type="checkbox"/> R64 64 Degree

DRIVER HOUSING	FINISH	SOURCE
<input type="checkbox"/> SDE Surface Drive Enclosure  2.25" H x 12.25" <input type="checkbox"/> DE Remote Driver Enclosure  (only available in Silver) 12.5" L x 3" W x 2" D	<input type="checkbox"/> S Silver	<input type="checkbox"/> P59-94

**OPTIONAL EMERGENCY BACKUP (FIELD INSTALLED)**

<input type="checkbox"/> CHA-EM-ITA	Yes
<input type="checkbox"/> (blank)	No