

SLM4IS

4" Indirect Square LED Recess Retrofit, 9W, Airtight Recess Lighting

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

Features

Body

Durable airtight aluminum body with coved reflector for low glare.

LED Characteristics

This general application light fixture features a 9 watt LED module that maintains uniform intensity producing up to 600 lumens; with a typical CRI of 80+. Available in 3000 K color temperature.

Dimming

100%~0% dimming capability. This fixture is compatible with industry standard forward/reverse phase dimmers (visit www.liteline.com/IndirectLEDdimmers for list of compatible dimmers).

Beam Spread

The fixture lens provides 140° beam spread.

Mounting

Includes two spring loaded clips to attach to any ceiling material.

LED Driver

Extruded aluminum hardwire box with 210mA dimmable class II electronic LED driver with 100-135V AC input. Includes an 18" plenum rated FT6 wire from driver to fixture.

Quick Connect push-in terminals

Three "Quick connect" push-in terminals for fast and easy wiring.

Operating Temperature

-20°C~40°C (-4°F~104°F)

Environment

- Suitable for damp locations.
- Suitable for insulated ceiling applications.


SPECIFICATION

Application	Ceiling Recess Mount
Approved Location	Damp / Insulated Ceilings
Beam Angle	140°
CCT	3000 K
Certification	cETLus
Class II	Yes
Color	WH
CRI	80+
Dimming	Yes
Dimming Tech	Forward/Reverse Phase
Hole Cut	4 $\frac{3}{16}$ " × 4 $\frac{3}{16}$ " (106mm × 106mm)
Input	100-135V AC, 60Hz, 0.09A
Lumens	600
Lumens per Watt	73
Power Factor	>0.9
Projected Life	70% @ 50,000 hrs
Rated Life	50,000 hrs
THD	15%
Warranty	Lifetime
Wattage	9W



Description

The SLM4IS is a 9 watt 4" square indirect LED light fixture for recess retrofit application. It is a high-performance, easy to install downlight solution that offers good light output, energy-efficiency and streamlined design. Suitable for damp locations. Ideal for new construction, remodelling and insulated ceiling applications. No recessed housing required.

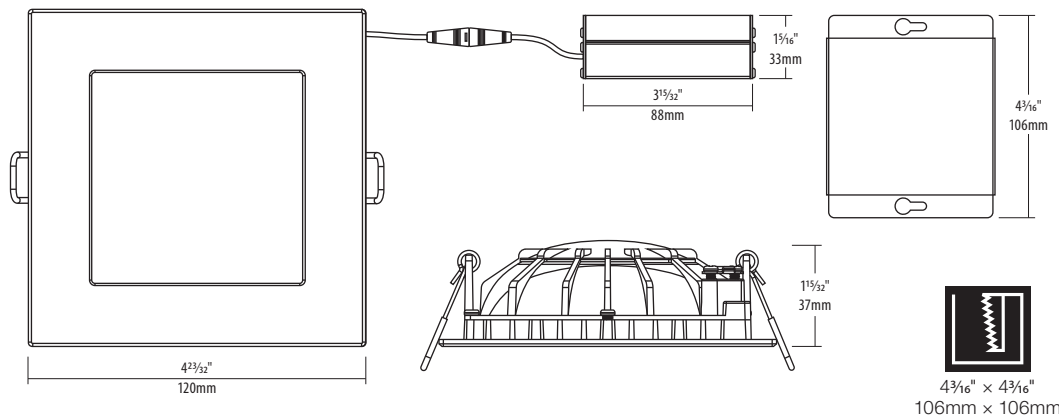

Notes: Accessories are sold separately. For additional options please consult your Liteline representative.
Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Ordering Guide

Color Temperature	Driver Options	Trim Finish
SLM4IS - <input type="text"/>	- <input type="text"/>	- <input type="text"/>
30 : 3000 K	Leave blank for standard 120V driver C : 120~347V, 0-10V	WH : White

Accessories



SLM-60-FC

60" Flexible connector, for use with SLIMLED fixtures.



P-4020S

4¼" Square pre-mounting plate with driver attachment clip, for 4" SLIMLED square fixtures.



P-NCMK-1

New construction mounting kit. Includes hanger bars, brackets and screws.



VBE-1

Vapour barrier extender. For use in new construction applications.



VBE-2

Vapour barrier extender. For use in remodel applications.



VBE-3

Vapour barrier extender. For use in remodel applications.



VBE-4

Vapour barrier extender. For use in remodel applications.