

# LOUVERED SQUARE VERSA STAR (GU10 - CORE DRILL)

IP65 RATED

|       |          |       |
|-------|----------|-------|
| DATE: | PROJECT: | TYPE: |
|-------|----------|-------|

CATALOG NUMBER LOGIC:



## CATALOG NUMBER LOGIC

Example: B - CD - VQL - GU - 0 - SAP - 9 - 11 - D

## MATERIAL

(Blank) - Aluminum B - Brass S - Stainless Steel

## INSTALLATION

CD - Core Drill

## SERIES

VQL - Louvered Square Versa Star

## SOURCE

GU - GU10 Line Voltage MR16

## LAMP TYPE

0 - Furnished by Others

## FINISH (See page 2 for full-color swatches)

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRI, CRM, HUG, MDS, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

Also available in RAL Finishes

Brass Finishes (MAC, POL, MIT)

Stainless Steel Finishes (MAC, POL)

## LENS TYPE

9 - Clear (Standard)

10 - Spread 12 - Soft Focus 13 - Rectilinear

## SHIELDING

11 - Honeycomb Baffle

## LOUVER

D - 30° Angle, Rectangular Pattern

G - 0° Angle, Rectangular Pattern

**B-K LIGHTING**

**MADE IN THE USA**

559.438.5800 | [INFO@BKLIGHTING.COM](mailto:INFO@BKLIGHTING.COM) | [BKLIGHTING.COM](http://BKLIGHTING.COM)


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.

08/28/2020 SKU-568  
SUB-1491-00


DATE:

PROJECT:


TYPE:

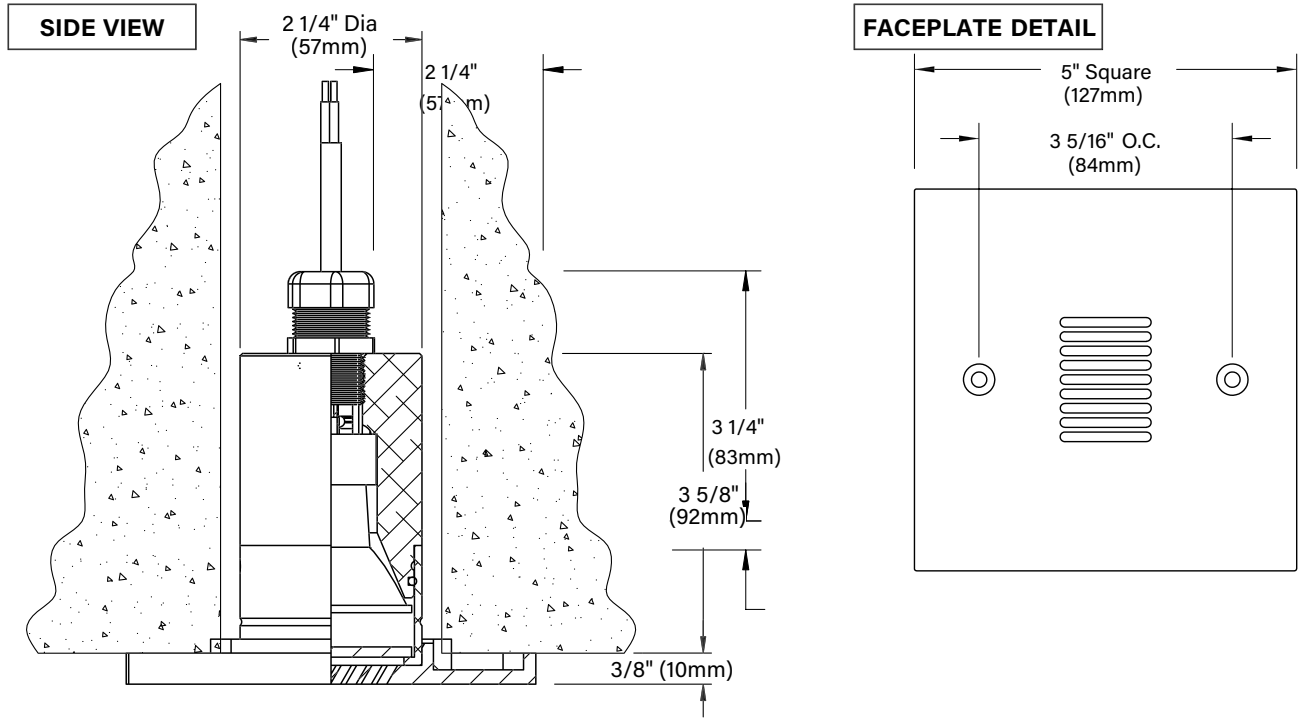

**LOUVER OPTIONS**



Pattern D  
(30° Angle, Rectangular Pattern)




Pattern G  
(0° Angle, Rectangular Pattern)

**STANDARD FINISHES**



**PREMIUM FINISHES**

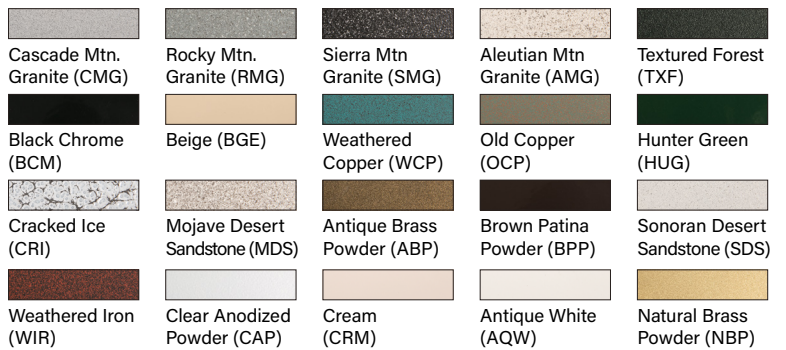

[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

|       |          |       |
|-------|----------|-------|
| DATE: | PROJECT: | TYPE: |
|-------|----------|-------|

ACCESSORIES (Configure separately)

SPECIFICATIONS

|                         |  |   |
|-------------------------|--|---|
| ELECTRICAL              | WATTAGE  | 20W, 35W, or 50W  |
|                         | WIRING   | Teflon® coated, 18AWG, 600V, 250° C rated and certified to UL 1659 standard. Anti-Siphon Valve (ASV) prevents “wicking” through conductor insulation.   |
| PHYSICAL                | MATERIALS  | Furnished in copper-free aluminum (6061-T6), brass (360), or stainless steel (304).   |
|                         | CORE DRILL   | Allows for mounting into existing structures that will not easily accept a standard box. Machined from solid, copper-free aluminum. Weather-tight cable connector with 5/0, 12Ga., 3 wire line voltage cable. 2-1/2" dia. hole required for slip fit.           |
|                         | FACEPLATE  | Copper-free, cast aluminum construction with machined finish. Also available in solid machined brass. Countersunk holes allow for flush hardware mounting.  |
|                         | LAMP   | For use with bi-pin GU10 line voltage lamps.  |
|                         | INSTALLATION   | For use with 50W maximum lamp when installed into non-combustible materials.  |
|                         | LENS   | Clear, tempered glass lens.   |
|                         | SOCKET   | Specification grade, ceramic body lamp holder. GU10 base. Nickel alloy contacts and heat-resistant, spring-loaded, stainless steel lamp retaining clips.  |
|                         | LOUVERS & AIMING   | Choice of 30° and 0° cutoff in rectangular pattern.   |
|                         | FINISH   | StarGuard, our 15-stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant. Brass components are available in powder coat or handcrafted metal finish. |
|                         | WARRANTY   | 5-year limited warranty.  |
| CERTIFICATION & LISTING | UL Listed. Certified to CAN/CSA/ANSI standards. Suitable for outdoor use and in wet locations. RoHS compliant. IP65 Rated. Made in the USA with sustainable processes. |   |

