

ABOVE

Designed by Mads Ogdård



Description

The fixture emits soft comfortable downlight. The conical shape and the matte, white-painted inside help assure even distribution of the light. The opening at the top of the fixture provides decorative illumination of the arch above, and ensures that the fixture retains the full expression of its visual shape both when illuminated and when switched off.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000149691	BLK, 776	15.7 / 18.9 / 15.7 IN / 8.7 LB
10000149852	WHT, 650	15.7 / 18.9 / 15.7 IN / 8.7 LB
10000149855	BLK, 776	15.7 / 18.9 / 15.7 IN / 8.7 LB
10000149856	WHT, 650	15.7 / 18.9 / 15.7 IN / 8.7 LB
10000149859	BLK, 776	15.7 / 18.9 / 15.7 IN / 8.7 LB
10000149860	WHT, 650	15.7 / 18.9 / 15.7 IN / 8.7 LB
10000149863	BLK, 776	15.7 / 18.9 / 15.7 IN / 8.7 LB
10000149864	WHT, 650	15.7 / 18.9 / 15.7 IN / 8.7 LB
5741919730	WHT, 650	6.9 / 8.3 / 6.9 IN / 2.6 LB
5741919743	BLK, 776	6.9 / 8.3 / 6.9 IN / 2.6 LB
5741919756	WHT, 650	9.8 / 11.8 / 9.8 IN / 3.3 LB
5741919769	BLK, 776	9.8 / 11.8 / 9.8 IN / 3.3 LB
5741925371	WHT, 650	15.7 / 18.9 / 15.7 IN / 5.4 LB
5741925384	BLK, 776	15.7 / 18.9 / 15.7 IN / 5.4 LB

louis poulsen

Materials & Finishes

MATERIALS

Shade: Spun aluminum.

FINISHES

White, matte or black, matte, wet painted.

Mounting

Canopy: Black. Cord type: 3-conductor, 18 AWG cloth-covered power cord. Cord length: 12 feet. For mounting instructions, see download section on the product detail page.

Information

Electrical:

System Wattage: 10W to 44W

LED Wattage: 9 W or 42 W

Delivered lumens: 351 - 3,160

Efficacy: 35.1 lm/W - 71.8 lm/W

Dim-to-warm LED 3000K (100%) to 1800K (10%)

Certifications:

cULus, Dry Location

Protection class IP20

Controllability: Phase dimming or 0-10V dimming.


Color Rendering: $R_a \geq 90$ for LED variants.

Performance dependent upon screw-base lamp used in socketed variants.


For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

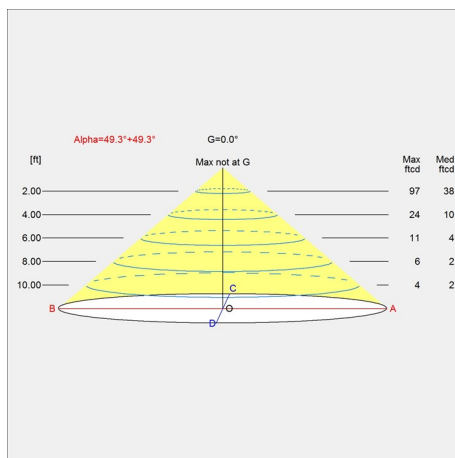

ISOLUX

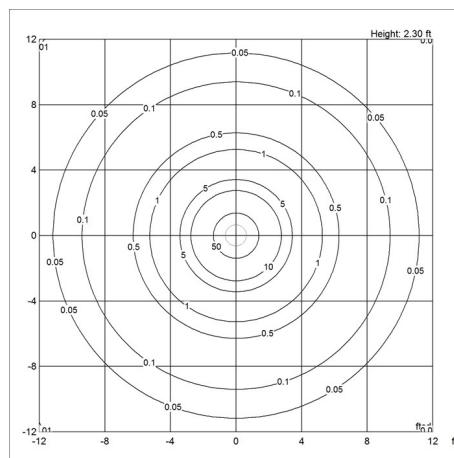

POLAR

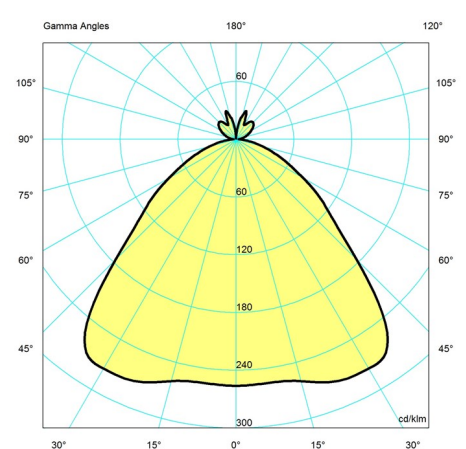

louis poulsen

Variant Options For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000149691	LED 3000K 44W	120-277V/60HZ	2929	Dim 0-10v	Black fabric cord
10000149852	LED 3000K 44W	120-277V/60HZ	2929	Dim 0-10v	Black fabric cord
10000149855	LED 3000K 44W	120V	2929	Phase dimming (mains dimm)	Black fabric cord
10000149856	LED 3000K 44W	120V	2929	Phase dimming (mains dimm)	Black fabric cord
10000149859	LED 3000-1800K D2W 44W	120-277V/60HZ	2413	Dim 0-10v	Black fabric cord
10000149860	LED 3000-1800K D2W 44W	120-277V/60HZ	2413	Dim 0-10v	Black fabric cord
10000149863	LED 3000-1800K D2W 44W	120V	2413	Phase dimming (mains dimm)	Black fabric cord
10000149864	LED 3000-1800K D2W 44W	120V	2413	Phase dimming (mains dimm)	Black fabric cord
5741919730	1x10W A-15/medium	120V	351	-	Black fabric cord
5741919743	1x10W A-15/medium	120V	351	-	Black fabric cord
5741919756	1x15W A-19/medium	120V	319	-	Black fabric cord
5741919769	1x15W A-19/medium	120V	319	-	Black fabric cord
5741925371	1x22W A-21/medium	120V	1253	-	Black fabric cord
5741925384	1x22W A-21/medium	120V	1253	-	Black fabric cord

Specification Notes

- 6.9 IN size available only in 10W/A-15/medium/120V.
- 9.8 IN size available only in 15W/A-19/medium/120V.
- 15.7 IN size available in 22W/A-21/120V or 44W LED/120V/Phase dimming or 44W LED/120-277V/0-10V dimming.
- Incandescent variants come with black cord and canopy. LED variants come with white cord and canopy.