


PH SNOWBALL

Designed by Poul Henningsen

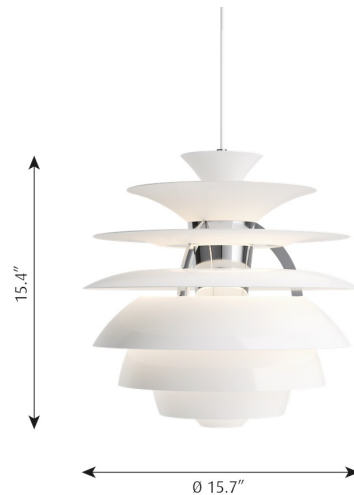

Description

The fixture emits comfortable glare-free diffused light. Matte painted undersurfaces and glossy top surfaces result in an attractive reflection of the diffused light, creating uniform light distribution around the fixture. When the light is switched on, the top portion is illuminated while the bottom part remains dark.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
10000149871	WHT, 092	15.7 / 15.4 / 15.7 IN / 9.8 LB
10000149872	WHT, 092	15.7 / 15.4 / 15.7 IN / 9.8 LB
10000149873	WHT, 092	15.7 / 15.4 / 15.7 IN / 9.8 LB
10000149874	WHT, 092	15.7 / 15.4 / 15.7 IN / 9.8 LB
5741928572	WHT, 092	15.7 / 15.4 / 15.7 IN / 7.7 LB

Materials & Finishes

MATERIALS

Shades: Spun aluminum. Frame: High lustre chrome plated, cast aluminum. Housing: High lustre chrome plated, spun aluminum.

FINISHES

White, wet painted.

Mounting


Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.
For mounting instructions, see download section on the product detail page.

Information


Electrical:
 System Wattage: 22W - 44W
 LED Wattage: 20 W - 42 W
 Delivered lumens: 894 - 1,085 lm
 Efficacy: 24.6 - 40.6 lm/W
 Certifications:
 cULus, Dry Location
 Protection class IP20
 Controllability: Phase dimming or 0-10V dimming.
 Color Rendering: Ra≥90 for LED variants.
 Performance dependent upon screw-base lamp used in socketed variants. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

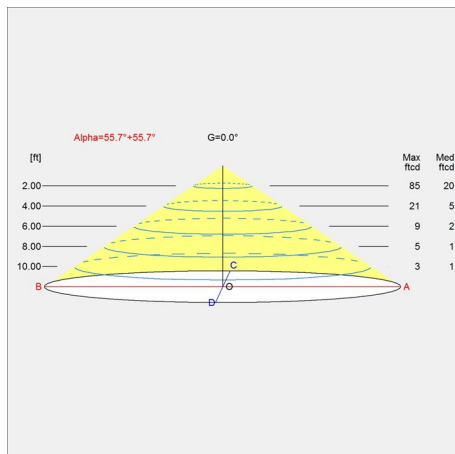

ISOLUX

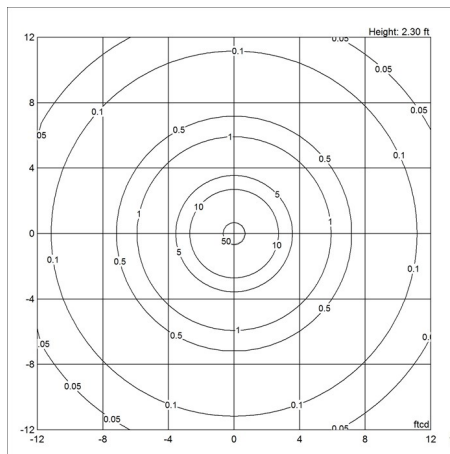

POLAR

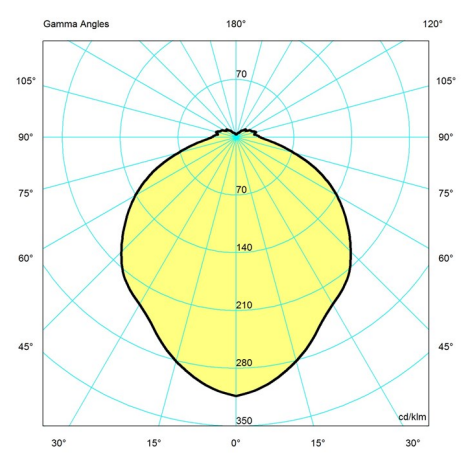

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
10000149871	LED 3000K 44W	120-277V/60HZ	1085	Dim 0-10v	White fabric cord
10000149872	LED 3000K 44W	120V	1085	Phase dimming (mains dimm)	White fabric cord
10000149873	LED 3000-1800K D2W 44W	120-277V/60HZ	894	Dim 0-10v	White fabric cord
10000149874	LED 3000-1800K D2W 44W	120V	894	Phase dimming (mains dimm)	White fabric cord

louis poulsen

5741928572

1x22W A-21/medium

120V

1235

-

White fabric cord

Specification Notes

a. Socketed variant available in 1/22W/A-21/120V.

b. LED variants available with mains dimming at 120V or 0-10V dimming with 120-277V.
