

YUH WALL

Designed by GamFratesi



Description

The fixture primarily provides glare-free downward directed light. The angle of the shade can be adjusted to optimize light distribution. A slim opening in the top of the shade provides soft, ambient upward illumination. A mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace, living room etc. Built-in LED technology provides a high quality of light with stepless dimming from 100% to 15%. Optional timer capability automatically turns off the light after a chosen duration of 4 or 8 hours. Returns to the last dim level setting when switched on. The switch and dimmer button is placed on the wall box.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5743905315	BLK, T09	11.7 / 24.6 / 11.7 IN / 4.8 LB
5743905328	WHT, T08	11.7 / 24.6 / 11.7 IN / 4.8 LB
5743913789	BRASS/BLACK	11.7 / 24.6 / 11.7 IN / 4.6 LB
5743913792	BRASS/WHITE	11.7 / 24.6 / 11.7 IN / 4.6 LB

Materials & Finishes

MATERIALS

Shade: Die cast aluminum. Stem: Extruded brass (wet painted or clear lacquered). Wall box: Die cast aluminum (wet painted) or extruded brass (clear lacquered).

FINISHES

White or black. Matte wet painted. Brass versions: White or black shade. Matte wet painted. Clear lacquered, brushed brass stem and wall box.

Mounting


Shade: Spun steel. Base: Spun aluminum. Arm: Steel. For mounting instructions, see download section on the product detail page.

Information


Electrical:
 System Wattage: 10W
 LED Wattage: 9W
 Delivered lumens: 446
 Efficacy: 44.6 lm/W
 Certifications:
 cULus, Dry Location
 Protection class IP20
 Controllability: Dimming by integral button switch
 Color Rendering: Ra≥90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

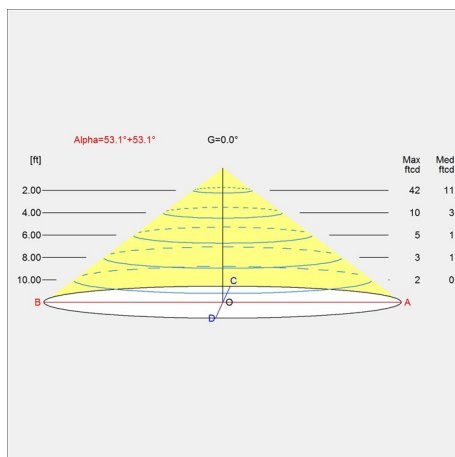

ISOLUX

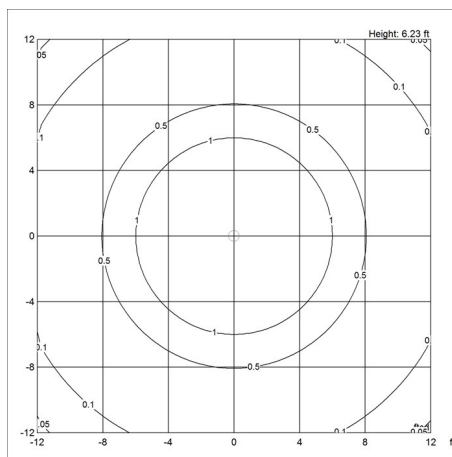

POLAR

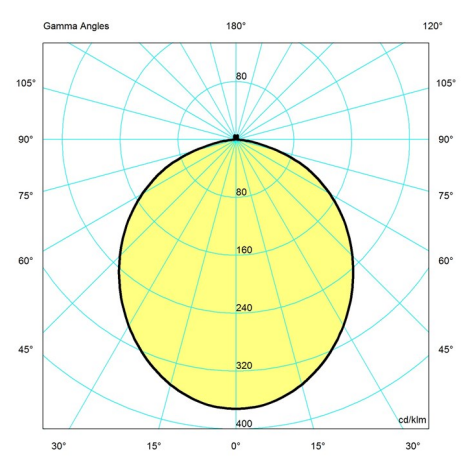

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
-------------	--------------	-------------	-------	----------	-------

louis poulsen

5743905315	LED 2700K 10W	120V	446	-	-
5743905328	LED 2700K 10W	120V	446	-	-
5743913789	LED 2700K 10W	120V	446	-	-
5743913792	LED 2700K 10W	120V	446	-	-
