


SKOT WALL

Designed by LK as

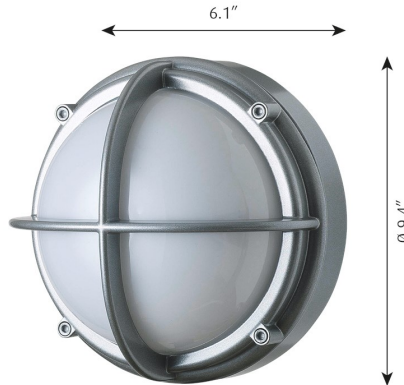

Description

The fixture is available with two types of distribution: symmetric or asymmetric. The asymmetric is only recommended for wall mounting. The opal diffuser creates a soft light distribution.

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5743911422	SILV, 168	9.4 / 6.1 / 9.4 IN / 5.9 LB
5743911435	SILV, 168	9.4 / 6.1 / 9.4 IN / 6.5 LB
5743911464	SILV, 168	9.4 / 6.1 / 9.4 IN / 5.9 LB
5743911477	SILV, 168	9.4 / 6.1 / 9.4 IN / 6.5 LB
5743911503	NAT PAINT ALU, 162	9.4 / 6.1 / 9.4 IN / 5.9 LB
5743911516	NAT PAINT ALU, 162	9.4 / 6.1 / 9.4 IN / 6.5 LB
5743911545	NAT PAINT ALU, 162	9.4 / 6.1 / 9.4 IN / 5.9 LB
5743911558	NAT PAINT ALU, 162	9.4 / 6.1 / 9.4 IN / 6.5 LB

Materials & Finishes

MATERIALS

Diffuser: Injection molded white opal polycarbonate. Base/cross guard: Die cast aluminum.

FINISHES

Natural painted aluminum or silver, powder coated.

Mounting


Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box. For mounting instructions, see download section on the product detail page.

Information


Electrical:
 System Wattage: 15 W
 LED Wattage: 14 W
 Delivered lumens: 308 lm - 476 lm
 Efficacy: 20.5 - 31.7 lm/W
 Certifications:
 cULus, Wet Location
 Protection class IP66
 IK class 10
 BUG Rating: B1-U2-G1
 Min.-Max. Ambient Temp: -40°C to +40°C
 Color Rendering: Ra≥80
 This product is non-dimming. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN




ISOLUX

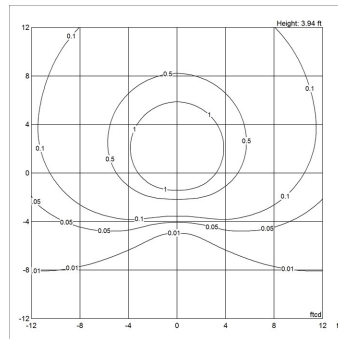

POLAR

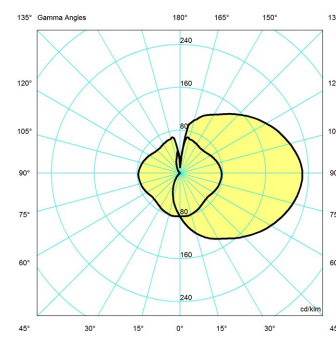

BUG

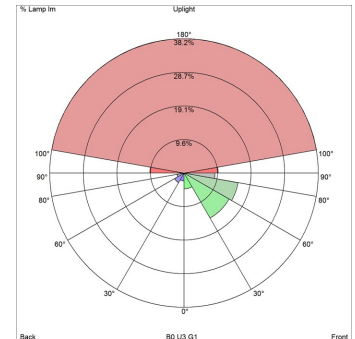

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5743911422	LED 3000K 15W	120-277V/60HZ	438	-	-
5743911435	LED 3000K 15W	120-277V/60HZ	308	-	-
5743911464	LED 4000K 15W	120-277V/60HZ	476	-	-
5743911477	LED 4000K 15W	120-277V/60HZ	476	-	-
5743911503	LED 3000K 15W	120-277V/60HZ	438	-	-
5743911516	LED 3000K 15W	120-277V/60HZ	308	-	-

louis poulsen

5743911545	LED 4000K 15W	120-277V/60HZ	476	-	-
5743911558	LED 4000K 15W	120-277V/60HZ	476	-	-
