



ACTIVE SAFETY

SAFER • LESS EXPENSIVE • SUSTAINABLE

USA 800.657.6324
www.activesafety.com

Project:
Arch:
Catalog #:
Date:

Series 2001

Photoluminescent Exit Sign • High & Low Level • UL924 Listed

Specification Features

- Viewing Distance: 50 feet
- Operating Life: 25+ years
- Activation: 5 foot-candles of LED or fluorescent, mercury vapor or metal halide lighting.
- Face Plate: Green illuminating heavy duty PVC.
- Frame: Black anodized aluminum.
- Letter Color: Red or Green.
- Directional: Field applied arrows (optional).
- Mounting: Wall, Flag, or Ceiling
- Attachments: Tamperproof metal screws, wall mount.
- Dimensions: Height: 8" Width: 15" Depth: 1/8" to 3/8"
- Features: Non-electrical, non-radioactive, low profile, explosion proof, low maintenance
- Warranty: Limited lifetime warranty.
- Green Attributes: No radioactivity. No power usage. No hazardous materials. Minimal maintenance. Long life. Recyclable.
- Listings & Codes: Listed to UL924.

Active Safety's Series 2001

photoluminescent exit signs are specified by leading architects and engineers for applications requiring a durable, traditional style photoluminescent sign. Typical locations include hotels, condos, schools, retail, offices, hospitals, parking garages, US military facilities and other locations conforming to the IBC, NFPA and UFC codes.

Non-electrical and non-radioactive, Active Safety Series 2001 photoluminescent exit signs are a favorite with green environmentally focused projects.

Photoluminescent operation means there are no electrical connections to engineer, procure and install. Once located adjacent to fluorescent lighting, Active Safety Series 2001 photoluminescent exit signs will operate for 25+ years with only minimal maintenance - no lamps, batteries or radioactive tubes to ever replace or dispose of.

Ordering Format (example: ACTIVE SAFETY (2001 – U – S – WM – R – 2A))

SERIES	STYLE	FACES	MOUNT LOCATION	LETTER COLOR	ARROWS
<u>2001</u>	'Blank' – black frame <u>U</u> - unframed	<u>S</u> – single <u>D</u> - double	<u>WM</u> – wall mount <u>CM</u> – ceiling or flag mount	<u>R</u> – Red <u>G</u> – Green	'Blank' – no arrows 1A - 1 arrow 2A – 2 arrows


Specification Description

High [or Low Level] Exit Sign. UL 924 listed. Photoluminescent, non-electrical, non-radioactive, 50 foot visibility rating, 25+ year life. Green illuminating heavy duty PVC construction with black anodized frame and 'field applied' arrows. Single and double sided face configurations consistent with ceiling, flag or wall mount applications as specified on project drawings. Matching bracket for ceiling and flag mount applications. **Active Safety Series 2001.**



Series 2001 Exit Sign

Product Dimensions and Installation Details

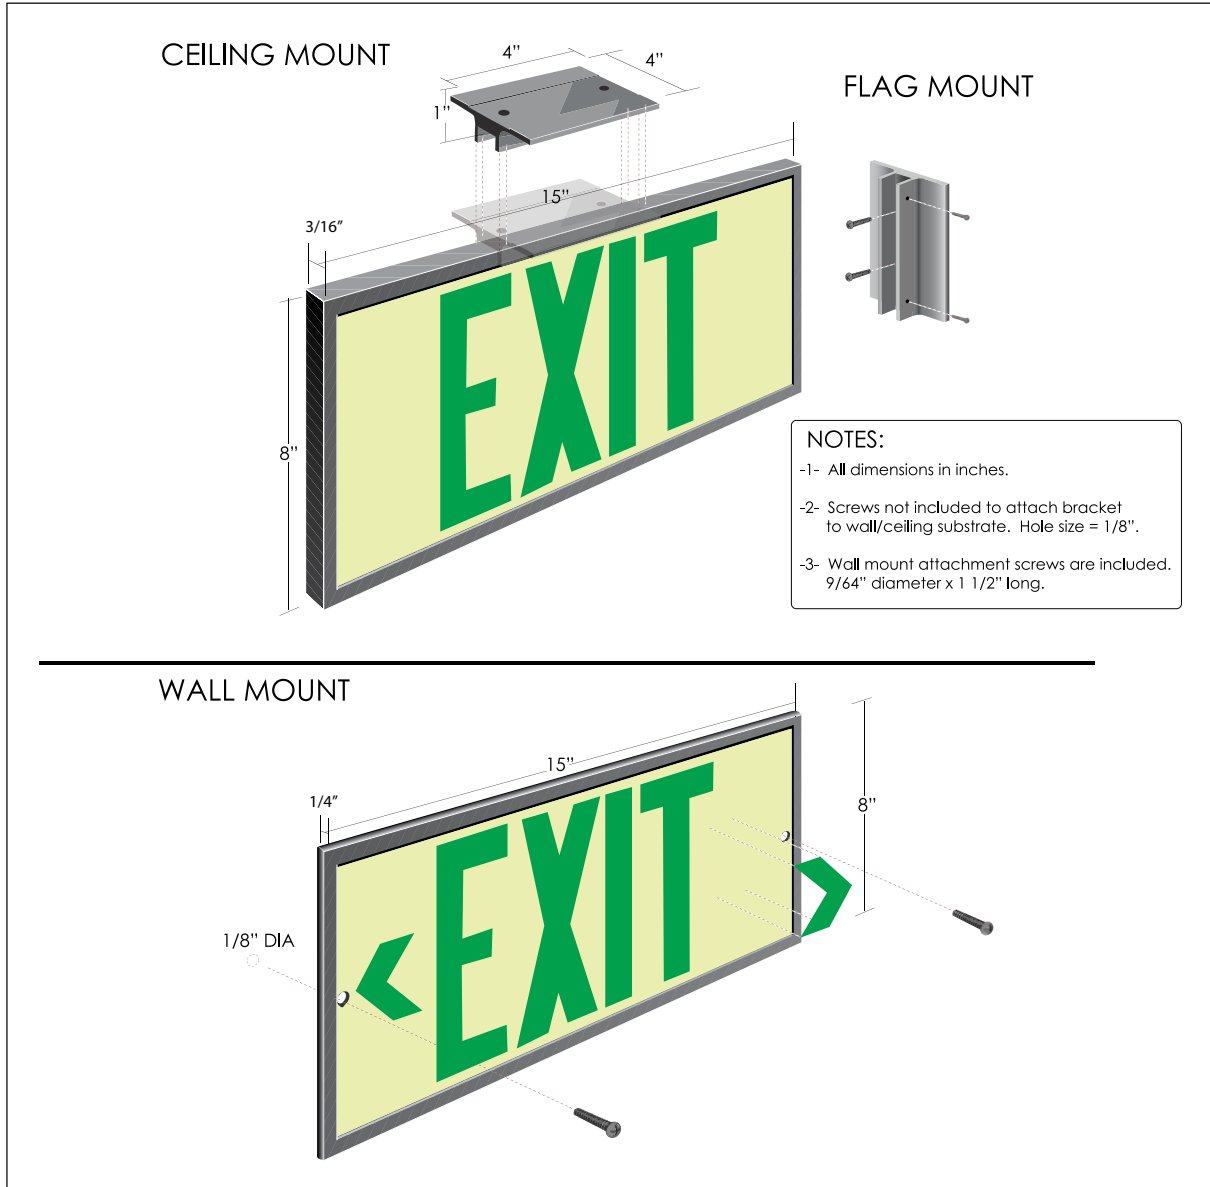

Attributes

- Non-electrical and non-radioactive. Activated by nearby light.
- Use instead of LED or Tritium in high and low exit sign locations.
- Durable and attractive 'traditional' design lasts 25+ years.
- Ceiling, wall, and flag mounting options. 50 foot viewing distance.
- Easy, quick installation – no electrical circuitry.
- Minimal maintenance – no lamps or batteries to replace.
- "Green", sustainable construction and operation. A favorite with LEED projects.
- UL924 listed. Energy Star listed. IBC,NFPA and US Military compliant. Fire Marshal approved.