

ACTIVE SAFETY

SAFER • LESS EXPENSIVE • SUSTAINABLE

USA 800.657.6324
www.activesafety.com

Project:
Contact:
Catalog #:
Date:

500 Series

Photoluminescent Floor Identification Sign

Features


Viewing Distance: 25 feet
 Operating Life: 25+ years
 Activation: 1 footcandle of artificial lighting: LED & Fluorescent.
 Sign Composition: PVC Placard.
 Sign Color: Yellow-green illuminating with black letters.
 Dimensions: Width: 12", Height: 18", or custom.
 Features: No hazardous materials. Easy installation. Automatic operation. Durable. Explosion-proof.
 Warranty: 10 years on materials, 25 years on glow.
 Green Attributes: Non-electrical, non-radioactive, UV-stable, durable, simple installation and minimal maintenance.
 Listings and Codes: UL 1994 listed. IBC, IFC & NFPA compliant.

Active Safety 500 Series Floor Identification Sign.

A durable PVC placard that installs directly onto the walls of exit pathways. Available in standard or custom sizes and with Braille script to accommodate floor information consistent with local building code. Designed for stairwells and exit passageways requiring photoluminescent egress systems.

Ordering Format (example: 500 – PVC – 1812 – B)

SERIES	MATERIAL	DIMENSIONS	BRAILLE
500 - Floor Identification Sign	PVC – Plastic	1812 – 12" wide x 18" high C – Custom	B - Braille script NB – no Braille script

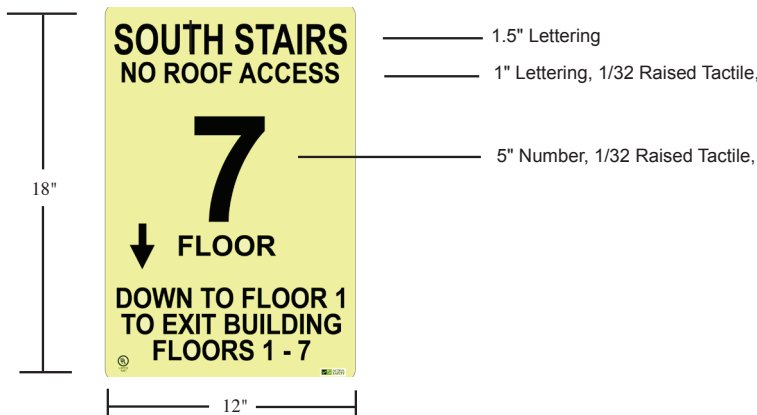

Specification Description

Photoluminescent Floor Identification Sign. UL 1994 Listed. Compliant to IBC, NFPA & IFC codes. Non-electrical, non-radioactive, photoluminescent operation. PVC sign with photoluminescent background, black lettering [and Braille script]. 25 foot visibility with 1 footcandle of charging illumination.

Active Safety 500 Series.
Specifications subject to change!