
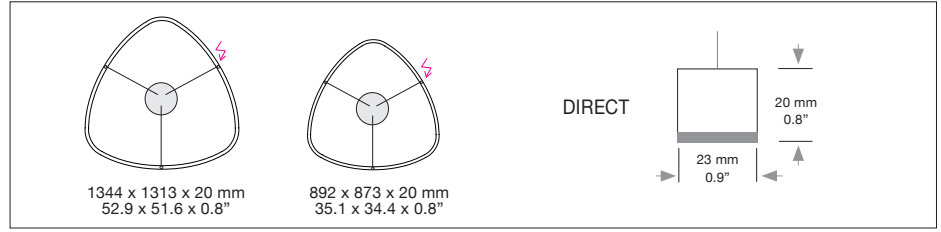


SLIM DELTA DIRECT

Housing: Aluminum profile with integrated opal diffuser downwards
Design: SATTLER

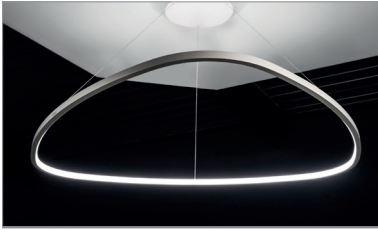

	Size: L x W x H mm	Inches	LED Watt	Lumen ¹	weight ² kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes	1344 x 1313 x 20	52.9 x 51.6 x 0.8"	88	3.597	5.5 / 12.1	1575.	x x .	x x .	x x .	x x .	x x x .	x
	892 x 873 x 20	35.1 x 34.4 x 0.8"	50	2.574	2.8 / 6.1	1577.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white Ultra warm-white Tunable white** ** (available with DMX or Casambi dimming only)	3000 K 4000 K 2700 K 2200 K* 2700 - 6500 K	(Standard) (Optional) (Optional) (Optional) (Optional)	x x x . x x x . x x x . x x x . x x x .	30. 40. 27. 22. 80.	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x .	x x x x x	
Dimming		Dimmable 0 - 10 V DMX CASAMBI	(Standard) (Optional) (Optional)	x x x . x x x . x x x .	x x . x x . x x .	51. 31. 81.	00. 00. 00.	x x . x x . x x .	x x x . x x x . x x x .	x x x		
Finishes		Optional (Powder coated)	10 black fine textured 30 anthracite 32 crocodile black 33 sand silver fine textured 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper	Optional (Premium)	22 aluminum polished 27 brush-finished aluminum XX Custom finish	x x x . x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x .	x x x . x x . x x . x x . x x . x x . x x . x x .	x x x x x x x x	
Power Supply Cable	Standard (mounting versions F, K, R, T) Optional (mounting versions A, B, E, G, S)	000 Steel current-carrying suspension cables (separate power cable not required)	Standard (mounting versions A, B, E, G, S)	Z 70 Silver Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 red Z 76 green	x x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x .	x x x . x x . x x . x x . x x . x x . x x .	x x x x x x x		

SLIM DELTA DIRECT



410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice



Canopy B, E, F, S, T
A, R, G, K



Light distribution direct




Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08


Technical data is subject to change. Errors and omissions excepted ¹Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. ²Weight of lights without remote technical unit or canopy.

SLIM DELTA DIRECT


Housing: Aluminum profile with integrated opal diffuser downwards
Design: SATTLER

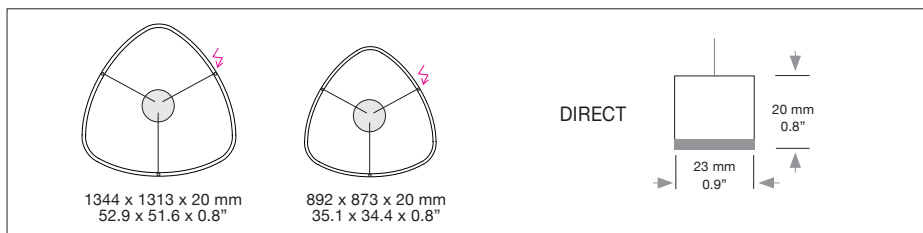


Mounting Version




3-point suspension (5m/197" max.) with drivers in offset surface mounted canopy, separate power cable. (Up to Ø 2600mm/102")




Drivers in center surface mounted canopy¹, current-carrying suspension cables. (Up to Ø 1800mm/71")^{4,5}




3-point straight suspension (197" max.) with remote mounted drivers, current-carrying suspension cables. (Up to Ø 1800mm/71")²




1-point suspension with drivers in pendant canopy PB 366, separate power cable from canopy down. (Up to Ø 1800mm/71")²
(a) Max. 5m/196" +
(b) Max. 3m/118"




1-point suspension with drivers in pendant canopy PB 366, current-carrying suspension cables from canopy down. (Up to Ø 1800mm/71")²
(a) Max. 5m/196" +
(b) Max. 3m/118"



Direct ceiling mounting 50mm/1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 3 cables and remote technical unit in suspended ceiling.



Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

¹ Mounting versions E & F = Minimum suspension height half the size of the light fixture, maximum suspension height two times the diameter of the light fixture
² Only available with 1 row of LED.

Including steel cable suspension 3000mm/118" and/or power supply cable 5000mm/197". Version S,T 5000 + 3000mm / 197"+118"

Driver enclosure dimensions (1 row of LED)

Type	Size mm / inch L W H	Size of lamp mm / inch.	Included with Mounting Version
DE 1F	360 x 150 x 85 14.2 x 5.9 x 3.3"	up to Ø 1800 / 62.9"	G, K
DE 2F	360 x 300 x 85 14.2 x 11.8 x 3.3"	up to size Ø 3500 / 137.8"	A, G

Power cable cover plate
(included with mounting version A, C & G) Ceiling opening box for power supply cable (80mm/3.1" Ø round metal cover). White powder coated finish.

Canopy dimensions of (1 row of LED)

Typ	Size mm / inch Ø cover plate-body x height	Included with Mounting Version
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" up to size Ø 1800 / 62.9"	B, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" up to size Ø 3500 / 137.8"	B, H
DB 145	Ø 145-133 x 55 mm / 5.7-5.2 x 2.2" up to size Ø 1800 / 62.9"	K
PB 366	Ø 90 H 366 mm / 3.5 x 14.4" up to size Ø 1320 / 51.9"	T
PB 656	Ø 90 H 656 mm / 3.5 x 25.8" up to size Ø 1800 / 70.8"	T

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all drivers is 120 / 277 VAC 50/60 Hz

Complete order number

Optional



CASAMBI wall-switch

207. 00. 00. 00. 11 (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20 Canopy B, E, F, S, T
IP 52 A, R, G, K



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

Technical data is subject to change. Errors and omissions excepted ¹Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. ²Weight of lights without remote technical unit or canopy.