


Trims for 6" Incandescent RL30 and RL38 Series Recessed Housings

Trims are compatible with 6" Incandescent Recessed Housings unless otherwise specified: RL30-IC, RL30S-IC, RL30S-ICSA, RL30-ICSA-R, RL30S-ICR, RL38, RL38S, RL38S-R, RL38-ICER and RL38-ICESA

All trims have white trim finish unless specified.

All trims are suitable for damp locations; only shower trims are listed for wet locations.



CTR1901-B-CLR

Black Baffle, Clear Reflector, Black Trim Ring

CTR1901-CLR

Black Baffle, Clear Reflector

CTR1901-WHT

White Baffle, White Reflector


White high heat rated ABS beveled trim ring. Specular aluminum reflector. (3) Heat-treated steel spring reflector clips.

Maximum Wattage:

IC Housings: 50W PAR30, 60W A19

Non-IC Housings: 75W PAR30, 90W PAR38, 100W A19

NOTE: Not compatible with shallow housings



CTR1913-P


Fresnel Shower Light Trim

Wet location listed. Beveled white steel trim ring. Polyethylene sponge gaskets. Flat, clear Fresnel glass lens. (2) Butterfly spring clips, heat treated steel.

Maximum Wattage:

IC Housings: 40W A19 (60W A19 can be used with RL38-ICER and RL38-ICESA housings)

Non-IC Housings: 60W A19

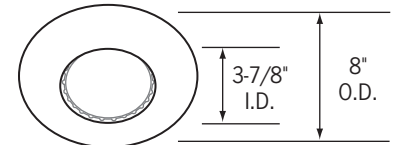

CTR3000-P

Open Trim

Maximum Wattage: 75W PAR30

CTR3800-P


Open Trim

Maximum Wattage:

IC Housings: 75W PAR38, 90W PAR38, 100W PAR38

Non-IC Housings: 120W BR40, 150W PAR38

Painted white steel beveled trim ring. Two double coiled heat-treated steel spring clips. Polyethylene sponge gaskets.

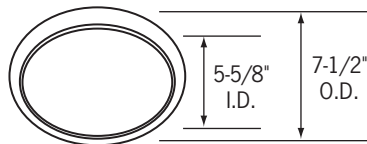

CTR1902-(CLR, WHT)

A-Lamp Multiplier, Clear or White Reflector


White high heat rated ABS beveled trim ring. Specular aluminum reflector. (3) Heat-treated steel spring pressure clips.

Maximum Wattage:

IC Housings: 50W PAR30, 60W A19

Non-IC Housings: 75W PAR30, 90W PAR38, 100W A19

NOTE: Not compatible with shallow housings



CTR1916-P

Drop Opal Shower Light Trim


Glass Lens, 1" Drop

Wet location listed. Beveled white steel trim ring. Polyethylene sponge gaskets. (2) Butterfly spring clips, heat treated steel.

Maximum Wattage:

IC Housings: 40W A19

Non-IC Housings: 60W A19

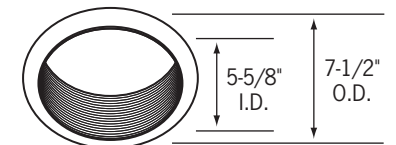


CTR1921CLR-BLK

Black Baffle, Clear Upper Reflector, White Plastic Trim Ring

CTR1921WHT-WHT

White Baffle, White Upper Reflector, White Plastic Trim Ring

Maximum Wattage: 65W BR30, 75W PAR30S, 75W PAR30L, 75W PAR38

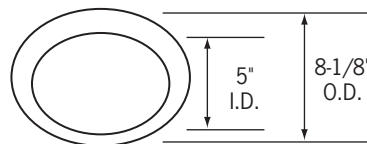

CTR1912-P


Albalite Shower Light Trim

Wet location listed. Beveled white steel trim ring. Polyethylene sponge gaskets. Flat opal Albalite glass. (2) Butterfly spring clips, heat treated steel.

Maximum Wattage:

IC Housings: 40W A19 (60W A19 can be used with RL38-ICER and RL38-ICESA housings)

Non-IC Housings: 60W A19



CTR1916-PP

Drop Opal Shower Light Trim

Plastic Lens, 1-1/2" Drop

Wet location listed. Beveled white high-heat ABS trim ring. Polyethylene sponge gaskets. (2) Butterfly spring clips.

Maximum Wattage:

IC Housings: 40W A19

Non-IC Housings: 60W A19

Reflector/Trim Finishes


Reflector Finish Options:

BLK - Black **CLR** - Clear
WHT - White

Trim Finish Options:

B - Black **PP** - White Plastic
P - White
S - Silver

Trims for 6" Incandescent RL30 and RL38 Series Recessed Housings

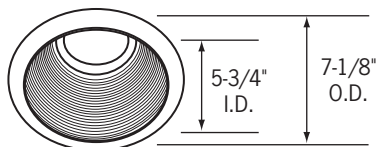

CTR3001-(B, P, WHT)

Tapered Black Baffle/Trim Ring, Black Baffle/
White Trim Ring, or White Baffle/Trim Ring

Maximum Wattage: 65W BR30, 75W PAR30

CTR3001W-WHT

Tapered White Baffle with Oversized Trim Ring.
O.D.: 7-3/4"

Maximum Wattage: 65W BR30, 75W PAR30

CTR3801-(P, WHT)


Tapered Black Baffle/ White Trim Ring or White
Baffle/Trim Ring

Maximum Wattage:

IC Housings: 60W PAR38

Non-IC Housings: 120W BR40, 150W PAR38

White high heat rated ABS beveled trim ring. (2)
Double coiled heat-treated steel spring clips.
Tapered steel baffle.

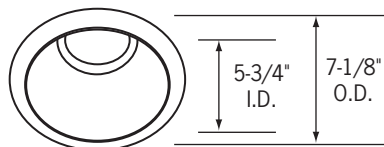

CTR3002-B-BLK

Black Specular Reflector, Black Trim

Maximum Wattage: 65W BR30, 75W PAR30

CTR3002-(BLK, CLR)

Black or Clear Specular Reflector

CTR3002-WHT

White Multiplier

Maximum Wattage: 65W BR30, 75W PAR30

CTR3802-B-BLK

Black Specular Reflector, Black Trim Ring

Maximum Wattage:

IC Housings: 75W PAR38, 90W PAR38, 100W PAR38

Non-IC Housings: 120W BR40, 150W PAR38

CTR3802-(BLK, CLR)

Black or Clear Specular Reflector

CTR3802-WHT

White Multiplier


Maximum Wattage:

IC Housings: 75W PAR38, 90W PAR38, 100W PAR38

Non-IC Housings: 120W BR40, 150W PAR38

Heat Lamp: 150W R40 Heat Lamp, for use with RL38
Non-IC housing only

White high heat rated ABS beveled trim ring. (2)
Double coiled heat-treated steel spring clips.
Tapered steel specular reflector on "BLK" finishes.
Tapered aluminum specular reflector on "CLR" and
"WHT" finishes.

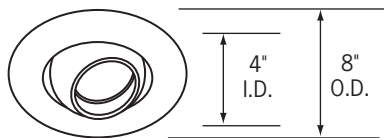


CTR3008-P

Eyeball

35° Vertical adjustment. Beveled steel trim ring.
Polyethylene sponge gaskets. (2) Butterfly spring
clips, heat-treated steel. Steel eyeball construction.

Maximum Wattage: 75W PAR30

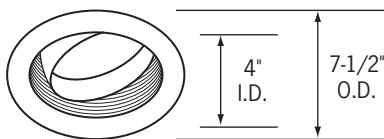


CTR3009-WHT

Regressed Eyeball; White Baffle

30° Vertical adjustment. Flat, high-heat ABS white
trim ring. (3) Leaf reflector clips: spring steel,
heat-treated, black oxidation plated. White aluminum
tapered baffle. White steel eyeball construction.

Maximum Wattage: 75W PAR30

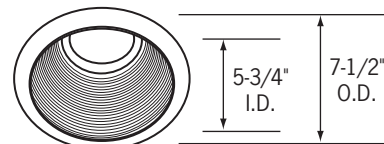

CTR6001AT-WHT

Self flanged, air-tight, tapered baffle. White
Baffle/Trim Ring

Maximum Wattage:

IC Housings: 75W PAR30

Non-IC Housings: 150W PAR38

NOTE: Not compatible with shallow housings

Reflector/Trim Finishes

Reflector Finish Options:

BLK - Black **CLR** - Clear
WHT - White

Trim Finish Options:

B - Black **PP** - White Plastic
P - White
S - Silver