

# STPLAM

## Wildlife Safe Amber LED Step Light Accent Series

### Specifications/Features

#### Housing

Energy efficient, compact LED Steplights provide maintenance free illumination in excess of 50,000 hours.

Suitable for interior or exterior applications.

Constructed of high impact, weather resistant polycarbonate.

Compact size and integral driver for simple wiring and easy installation into 2" x 4" junction boxes.

Durable, die-cast metal faceplate.

Two different faceplate options provide excellent cutoff.

Faceplate designs are available in Bronze finish.

#### Lamp/Electrical

LED light module consists of (12) LEDs in Amber with integral LED driver circuit.

Wire lead length: 7"

Total Wattage: 1.3W

Electrical Rating: 120V, 60Hz

Dimming not available.

Emergency back-up, with 120V inverter system, by others.

#### Mounting

Fixture can be mounted to 2" x 4" junction box using the (2) mounting screws provided.

Choose between using (2) Phillips head mounting screws or (2) tamper resistant hex head screws for installation.

Product is IP65 rated, includes a 2" x 4" gasket for exterior applications and for eliminating light leak.

#### Warranty



This complete fixture is covered by ConTech's full five (5) year replacement guarantee after date of purchase.

#### Listing


cULus listed. Suitable for wet locations.

Wildlife Lighting Certification Number 2018-026.

Wildlife and Sea Turtle friendly.

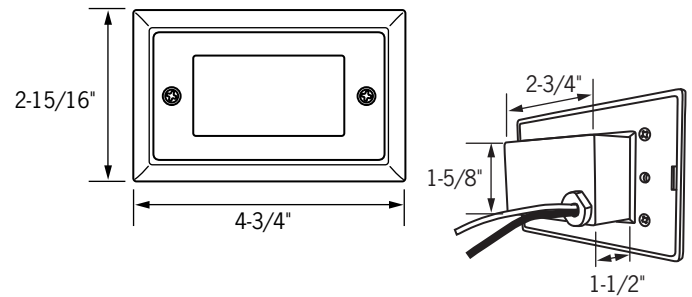

LV - Louver, Vertical



LH - Louver, Horizontal



### Ordering Information

Example Order:  -

Fixture	Color Temperature	Faceplate	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

**STPL**

**AM** - Amber

**LH** - Louver, Horizontal  
**LV** - Louver, Vertical

**BR** - Bronze

# STPLAM


## Amber LED Step Light Accent Series

### Photometrics


#### STPLAMLH

Designed for 50,000 Hour Lamp Life

**Spectral Power Distribution Chart**

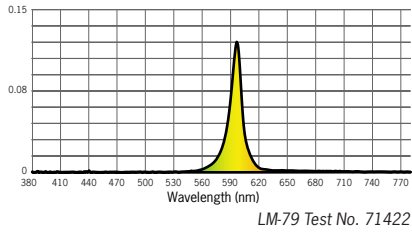


**Candela Curve**



#### STPLAMLV

Designed for 50,000 Hour Lamp Life

**Spectral Power Distribution Chart**

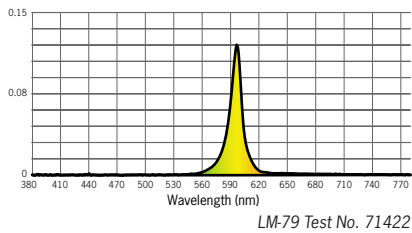

**Candela Curve**

