

JOB NAME _____

CONTACT _____

ORDERING CODE _____



LM-79

XICATO XTM MODULE - ORDERING CODES

SERIES	608	
APERTURE	3	3"
LED	XTM19 Xicato XTM 19mm	
DELIVERED LUMENS	11LM 835 lm 13LM 950 lm 16LM 1160 lm 20LM¹ 1470 lm	Standard Configuration: 3000K 83CRI SA20
CCT	27K 2700K B27K² 2700K beauty 30K 3000K V30K 3000K vibrant 35K 3500K 40K 4000K	
CRI	83 83 CRI 98^{1,2} 98 CRI	
REFLECTOR & LUMEN MULTIPLIER	SSA20 20° semi-specular (0.92) SSA40 40° semi-specular (0.82) SSA60 60° semi-specular (0.93) SA20 20° specular (1.00) SA40 40° specular (1.00) SA60 60° specular (0.99) DA20 20° diffused (0.86) DA40 40° diffused (0.88) DA60 60° diffused (0.89) 10° narrow beam angle, see page 2 for details.	
VOLTAGE	120³ 120V UNV⁴ 120V-277V	
DIMMING	ELV³ 10% trailing edge dimming 10V⁴ 0-10V dimming to 10% See Dimming Availability Chart at the bottom of this page for details.	
FINISH	BK black WH white MC matte chrome	
MOUNTING OPTIONS	P pendant S surface mount ECOBK 700/HALO black ECOSV 700/HALO matte chrome ECOWH 700/HALO white GEOBK 710 black GEOSV 710 matte chrome GGEOWH 710 white	
LITE OPTICS	CLR standard snoot / lens CRO corona ring / lens (0.89)	

BETA3"

Round Cylinder Xicato

XICATO



BK



WH

DESCRIPTION

BETA3 is a performance spot fixture in a par20 cylinder form factor integrated with industry best LEDs up to 1470lm. BETA3 has many options for most applications and carries the first 5 Year NO COLOR SHIFT AND FIXTURE WARRANTY.

HOUSING

Extruded aluminum housing with white, matte chrome or black finish

MOUNTING

- Pendants provided with 60" adjustable cord.
- Canopy over a 3-1/2" to 4" recessed octagonal junction box for P and S mounting options.
- Optional track mounting: Global Trac Systems, 710 track, and 700 track/Halo® Power Trac track.

LISTINGS

- ETLus Listed to UL1598 (suitable for dry and damp locations)
- ETLus Listed to UL1574 (track suitable for dry locations only)
- cETL Listed to CSA C22.2 #250.0 and #9.0
- Made in the USA - meets the requirements of the Buy American provision within the ARRA

LED INFO

- XICATO XTM: SDCM = 1x2 MacAdam Ellipse, Duv +/- 0.001, Lumen Maintenance: L₉₀ > 55,000 hrs

ORDERING CODE

Follow the steps to specify your fixture, example:

608 - 3 - XTM19 - 20LM - 35K - 83 - SSA20 - 120 - ELV - MC - S - CLR

XTM19 (LED)	POWER		DIMMING AVAILABILITY	
	DELIVERED LM	W (83 CRI)	W (98 CRI)	
835	13	14	11LM 83	•
950	15	17	11LM 98	•
1160	16	18	13LM 83	• •
1470	18	N/A	13LM 98	•
			16LM 83	• •
			16LM 98	• •
			20LM 83	• •
			20LM 98	

Power Factor ≥ 0.9

NOTES

- 1.20LM not available in 98 CRI.
- 2.B27K Beauty Series choose 98 CRI (actual 93). Available in 11LM with ELV dimming and 13LM with 10V dimming.
- 3.ELV dimming only available in 120V.
- 4.0-10V dimming only available in UNV voltage with S or P mount.

10° NARROW BEAM - ORDERING CODES

SERIES	608	
APERTURE	3	3"
LED	XTM09	Xicato XTM 9mm
DELIVERED LUMENS	12LM	900 lm
CCT	27K 30K 35K 40K	2700K 3000K 3500K 4000K
CRI	83	83 CRI
REFLECTOR	SA10	10° specular
VOLTAGE	120 ¹ UNV ²	120V 120V-277V
DIMMING	ELV ¹ 10V ²	10% trailing edge dimming 0-10V dimming to 10%
FINISH	BK WH MC	black white matte chrome
MOUNTING	S P ECOBK ECOSV ECOWH GEOBK GEOSV GEOWH	surface mount pendant 700/HALO black 700/HALO matte chrome 700/HALO white 710 black 710 matte chrome 710 white
LITE OPTICS	CLR CRO	standard snoot / lens corona ring / lens (0.89)

ORDERING CODE

Follow the steps to specify your fixture, example:

608 - 3 - XTM09 - 12LM - 35K - 83 - SA10 - 120 - ELV - MC - S - CLR

XTM09 (LED)	POWER
DELIVERED LM	W (83 CRI)
900	16

Power Factor ≥ 0.9


NOTES

1. ELV dimming only available in 120V.
2. 0-10V dimming only available in UNV Voltage with S or P mount.


MOUNTING OPTIONS

Mounting Options


- S** surface mount
- P** pendant
- ECOBK** 700/HALO black
- ECOSV** 700/HALO matte chrome
- ECOWH** 700/HALO white
- GEOBK** 710 black
- GEOSV** 710 matte chrome
- GEOWH** 710 white




ECO/HALO

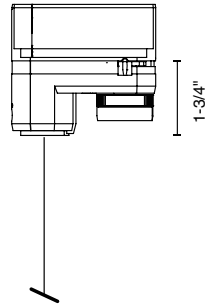


GEO

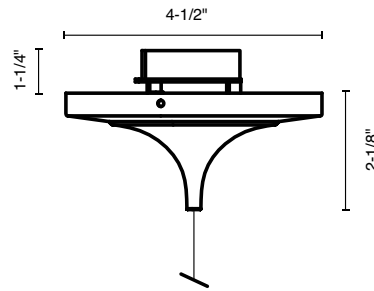


P (ELV)

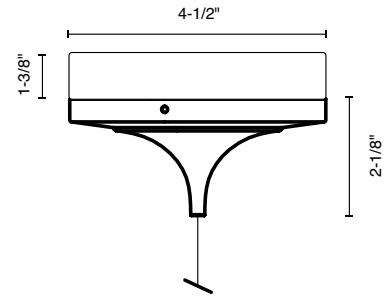


P (10V)

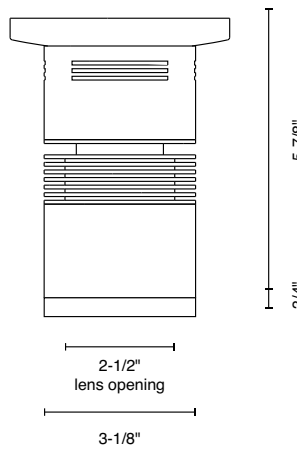


SURFACE WITH CRO
ELV

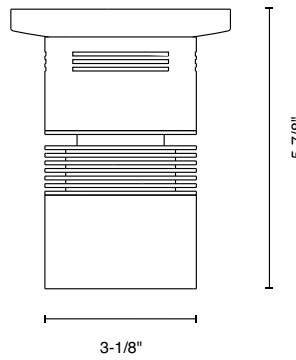


SURFACE
ELV

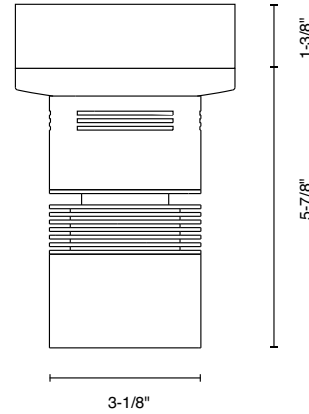

SURFACE
10V

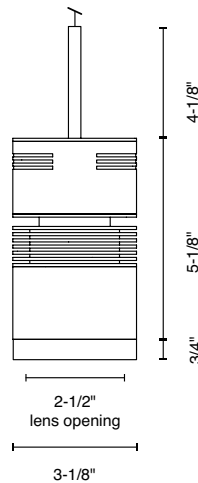

PENDANT WITH CRO

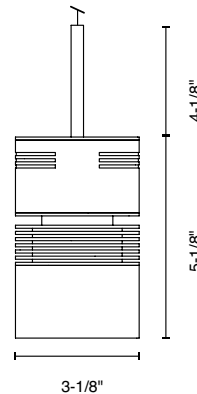

PENDANT

ACCESSORIES

- 900300bk Snoot, black
- 900300mc Snoot, matte chrome
- 900300wh Snoot, white
- 900310 Louver, black
- 900305bk¹ Barn doors, black
- 900321 Diffuser lens
- 900322 Frosted lens
- 900320 Linear lens

Notes

1. Barn Doors Requires 900300 Snoot Accessory



* shown with no accessory



Snoot



Louver



Barn Doors



900321

900322

900320

Lens Options