

Fixture Type	Lamp Type
Job Ref. / Location	

APPROVAL



STANDARD FEATURES

- Unique parallel lamp operation ensures that the failure of any L.E.D. will not extinguish legend illumination.
- Full exit legend illumination, no light leaks.
- Long life, energy efficient L.E.D. light source
- Eliminates lamp replacements – long life L.E.D. lamps.
- Precision Diecast Aluminum Construction — Universal Mounting
- Standard color: Satin Brushed Face, Matte Black Frame.
- Single or double face with 6" high letters — 3/4" stroke.
- Diffuse Exit Legend evenly illuminated.
- Suitable for use in damp location, standard.
- Standard 120/277 VAC input utilizing magnetic isolation transformer.
- Concealed universal chevron style arrows.
- Universal canopy included.
- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
- U.L. Listed



UNIT FEATURES

BATTERY EXIT

- Battery emergency illumination - 90 minutes
- Same overall size as A.C. Exit - no external Battery Pack
- Long Life, High Temperature, Sealed Nickel Cadmium Maintenance Free Battery - 15 year life expectancy (Battery emergency illumination - 90 min.)
- LED Charge indicator light, Push to Test Switch.

A.C.EXIT

- Standard 120/277 VAC input

OPTIONAL FINISHES

Item	Add Prefix
<input type="checkbox"/> All Black	B - #
<input type="checkbox"/> All Brushed	A - #
<input type="checkbox"/> All White	W - #

SELECTION GUIDE

TYPE/ MOUNTING	A.C. OPERATION	BATTERY OPERATION
	120/277 VAC 60 Hz	
Single Face Universal Mount (w/shallow canopy)	<input type="checkbox"/> LDX1CR	<input type="checkbox"/> LDEX1CR
Double Face Universal Mount	<input type="checkbox"/> LDX2R	<input type="checkbox"/> LDEX2R

- Green Stencil Legend**Change "R" in Catalog # to "G"

LUMINATOR V

L.E.D. EXIT SIGN SERIES LDX, LDEX Specification Grade Diecast Aluminum A.C. or Battery Operation



Satin Brushed Face with Black Frame (Standard)



Optional Black Finish





Optional White Finish

- 120/277 VAC Input
- Uniform exit illumination
- Nickel Cadmium Battery

All exits manufactured in accordance with U.L. standard 924, and meet or exceed requirements as established by the National Electrical Code Article 700 and Life Safety Code NFPA101. Specifications subject to change without notice.

MOUNTING AND DIMENSIONS

**SINGLE FACE
UNIVERSAL SIDE OR TOP MOUNTING**

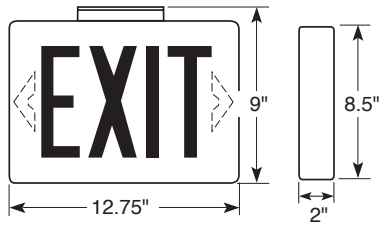

**SINGLE FACE
WALL (BACK) MOUNTING**

Universal knockout cluster in back of exit for mounting to single gang 3" + 4" octagon or 4" square junction boxes.

OPTIONS/ACCESSORIES

Polycarbonate Vandal Shields

Catalog #

- Wall Mount..... PS1
- Weather-proof (gasketed) wall mount..... PS6N4X
- Self Diagnostic Option..... SDT (Suffix)
- Wire GuardWG

PERFORMANCE

The outstanding illumination of the "LUMINATOR" Diecast LED Exit is achieved by utilizing an array of internal mounted high output light emitting diodes. The entire exit legend is uniformly illuminated in a soft even glow of light. Illumination in both the A.C. and emergency modes exceeds the requirement of the NFPA-101 Life Safety Code and U.L. Standard #924.

ORDERING INFORMATION - BATTERY EXITS

Standard Finish: Brushed Aluminum Face with Black Housing. For combination finishes, specify Face Plate followed by Housing Finish. See available finishes on front.



- All Black Finish
- L = LED Lamps
- D = Diecast
- Type of Exit: EX = Battery Exit
 - 1C = Single Face Universal Mount
 - 2 = Double Face Universal Mount

- Faceplate Color
- R = Red Stencil
 - G = Green Stencil

ELECTRICAL: AC Input: 120/277 VAC 60 Hz - 3.7 Watts.

ORDERING INFORMATION - A.C. EXITS



- Optional White Finish
- L = LED Lamps
- D = Diecast
- X = AC exit
 - 1C = Single Face Universal Mount
 - 2 = Double Face Universal Mount

- Faceplate Color
- R = Red Stencil
 - G = Green Stencil

ELECTRICAL: AC Input: 120/277 VAC 60 Hz - 3.7 Watts