

Fixture Type	Lamp Type
Job Ref. / Location	

APPROVAL
----------



### STANDARD FEATURES

- Dual Voltage Input - 120/277 VAC 60 Hz
- Factory cycle tested for reliability
- Shipped fully assembled, ready to install
- Polycarbonate housing provides resistance to corrosive and non-hazardous dust environments
- UL listed for wet locations (-20°C to 50°C)
- Optional CEC certification for Title 20 Regulations
- Long lasting ultra-bright white LED lamp heads
- 1.875W (15 LEDs x 0.125) per head
- 3.7W remote capacity in operating temperatures of 0°C to 50°C. Remote heads published separately
- Sealed and gasketed weather proof lighting heads with tempered glass lenses
- Sealed and gasketed housing with hinge cover
- Grey or black finish
- Mounting provisions provided

### CHARGER/BATTERY

- 9.6V sealed Nicad maintenance free battery.
- Low battery voltage disconnect, brownout, power-on latch
- Controls: charge rate/power "on" LED
- Push to test switch
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

### APPLICANTS


Ideal for use in hostile environments where dirt, dust, oil, water, or corrosive elements such as salt, acids, alkalines, etc. are present. Best suited in areas such as petro-chemical plants, waste water treatment or processing plants. Although it may be used outdoors, exposure to direct sunlight or high ambient temperatures should be avoided.

### TECHNICAL INFORMATION

12 VOLT WIRE RUNS FOR REMOTE LOADS*		
TOTAL WATTS	ALLOWABLE WIRING DISTANCE	
	#12 WIRE	#10 WIRE
12	178'	283'
25	85'	135'
50	42'	67'
100	21'	33'
*6 VOLT - MULTIPLY DISTANCE BY .24		
INPUT .... 120/277 VAC ..... 60HZ - 24 WATTS		

## SERIES N18

Wet Location NEMA 4X  
Emergency Lighting

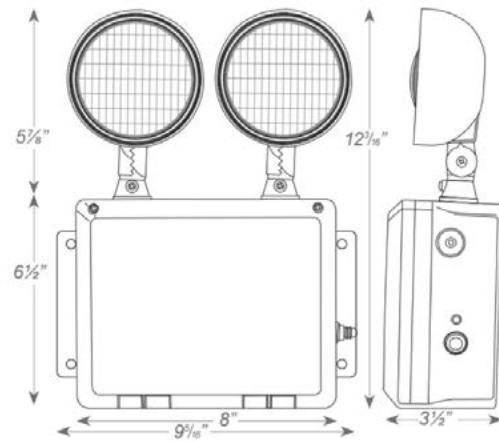

Catalog No.

MODEL NUMBER	HOUSING COLOR	OPTIONS
N18-2LED	blank = light gray	CEC = Title 20 compliant
	B = black	

All products are manufactured in accordance with U.L. standard 924. All Pathway® products meet or exceed requirements as established by the National Electrical Code. Specifications subject to change without notice.



Pathway Lighting Products, Inc., P.O. Box 591, Old Saybrook, CT 06475-0591  
voice: 800.342.0592 • fax: 800.207.0090 • www.pathwaylighting.com • e-mail: sales@pathwaylighting.com

EX3.0

CNCUUB