4113
120V-277V Universal Voltage

Catalog #:		Type
Project:		
Prepared by:		Date

1x4 LED Flat Panel

10.00
43.00
247.00
301.00
1159.00
1213.00
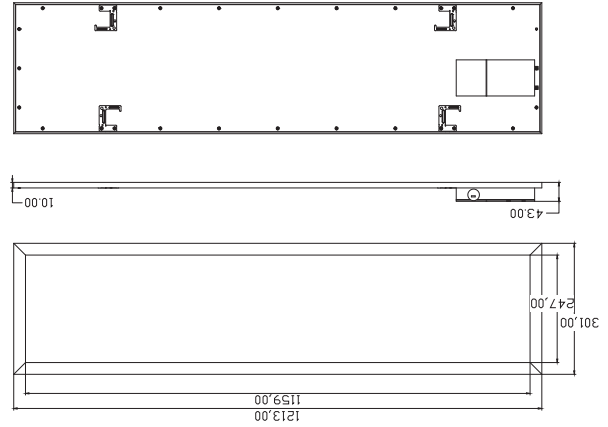
DESCRIPTION

A panel light that is an economical, lightweight and easy to use solution that installs easily into standard lay-in grid ceilings. These panels are ready for use in a variety of both commercial and residential locations including kitchen, basements, office buildings, schools, garages and recreation rooms.

DESIGN FEATURES

Construction
- Heavy duty, white powder coated aluminum frame
- Low-profile edge-lit design
- Damp listed

Electrical
- 120V-277V Universal Voltage
- Dimmable 0-10V
- 50,000 hour projected life
- 4000K | 80 CRI
- 40W | 4200lms

Installation
- Mounting hooks provide additional option for suspended chain or cable mount, flange kit available

Lens
- High performance lens is engineered to provide optimal lumen output with a uniform, glare-free distribution

Accessories (sold separately)
- 14FK - Flange kit
- 4113HC - Hanging cable kit

Certifications
- 5 year limited warranty
- UL Listed
- DLC Qualified

ORDERING GUIDE		*Example:4113WH-4K-EM*
Model #	**CCT**	**EM Option**
4113WH	**-4K**	
4113WH	**-4K** : 4000K	-blank : no EM **-EM** : add emergency option

---