


4432

Universal Voltage: 120-277V

Catalog #:		Type
Project:		Date
Prepared by:		

Adjustable LED Full-Cutoff Wall Pack

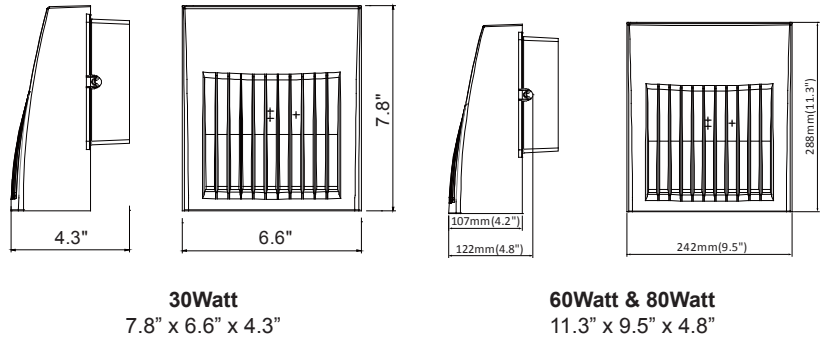

DESCRIPTION

Increase safety and security outside your building with the adjustable LED full-cutoff wall pack. A modern, minimal design, durable die-cast aluminum construction, and wet location rating make this an ideal wall pack for almost any application.

DESIGN FEATURES

Construction

- Fully sealed, durable die-cast aluminum
- Built-in photocell - Auto "on" at night | Auto "off" during the day

Electrical

- Universal Voltage: 120-277V
- Wattage options available
- Cooler operating temperature without driver
- Operating temperature: -4°F (-20°C) to 104°F (40°C)
- Stable driving current prevents inrush damage to circuit switches and modules
- Available in 80 CRI, 4000K and 5000K
- 100° beam angle

Installation

- Wall mount
- Easy one-person installation

Lens

- Clear acrylic lens protects LEDs while allowing for optimum lumen output

Finish

- Oil Rubbed Bronze

Certifications

- ETLus for wet location
- DLC Certified
- 5 year limited warranty
- Wet location



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

4432

AC100-277V

Specification & Ordering

Model #	Dimensions (H x W x D)	Watts	Lumens
4432OB-30-4K	7.8" x 6.6" x 4.3"	30W	2827lms
4432OB-60-4K	11.3" x 9.5" x 4.8"	60W	6562lms
4432OB-80-4K	11.3" x 9.5" x 4.8"	80W	8404lms
4432OB-30-5K	7.8" x 6.6" x 4.3"	30W	2827lms
4432OB-60-5K	11.3" x 9.5" x 4.8"	60W	6562lms
4432OB-80-5K	11.3" x 9.5" x 4.8"	80W	8404lms

ORDERING

Example: 4432OB-30-4K

Model #	Finish	Watts	CCT
4432	OB		
4432	OB : Oil Rubbed Bronze	-30 : 30W -60 : 60W -80 : 80W	-4K : 4000K -5K : 5000K