


# 4117 Series

120-277V Universal Voltage

Catalog #:		Type
Project:		Date
Prepared by:		

## LED 4' Linear Vapor Tight

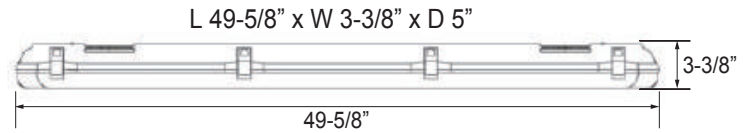

LED 4' Linear Vapor Tight

### DESCRIPTION

A low-profile, cost effective and energy efficient alternative to fluorescents, this LED Vapor Tight luminaire features a full-length, gasketed polycarbonate lens and single piece non-corrosive (PC) Polycarbonate body, advanced AC module. Designed to meet or exceed IP65 ratings against dust and pressurized water jets. Ideal for places where dirt, humidity, dust, and cold temperatures reside.

### DESIGN FEATURES

#### Construction

- Single piece polycarbonate body
- IP65 rated against ingress of dust and water jets
- 1/2" conduit access on either end
- 49.625" L x 3.375" W x 5" D

#### Electrical

- 120-277V Universal Voltage LED module with integrated IC chip embed on board
- Microwave motion sensor available
- Operating Temperature: -22°F to 122°F
- 50,000 hour projected life
- Dimmable TRIAC, 10-100% And 0-10V Dimming
- 35W | 3150Lm | 90Lm/W
- 50W | 4500Lm | 90Lm/W
- 70W | 6650Lm | 95Lm/W
- CRI 80

#### Installation

- Surface mount with included removable, snap-in mounting brackets
- Suspended installation with included wire support arms
- Tool-less lens lock system for easy wiring access

#### Lens

- Gasketed UV resistant polycarbonate lens
- Stainless Steel latches included

#### Certifications

- cCSA-us certified
- DLC listed
- Wet location (IP65)
- 5 year limited warranty

### ORDERING

Example: 4117WH-35-4K-EM

Model #	Finish	Watts	CCT	Option
4117	WH		-4K	
4117	WH : White	-35 : 35W -50 : 50W -70 : 70W	-4K : 4000K	-MS : Microwave motion sensor -EM : Emergency battery backup



TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

9/21/2020 R1



RP LIGHTING · FANS