


4429
120V-277V

Catalog #:		Type
Project:		Date
Prepared by:		

LED Non-Cutoff Wall Pack

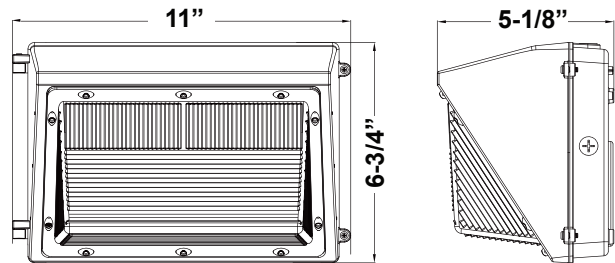

LED Non-Cutoff Wall Pack

DESCRIPTION

An ideal choice for high efficiency outdoor illumination, the LED Non-Cutoff Wall Pack is available in two standard power options, 45 watts or 70 watts. Suitable for both new construction and remodel, the standard form factor allows for a direct replacement of inefficient, conventional wall packs without repainting. This classic design is primarily used to increase security and visibility in commercial and industrial applications.

DESIGN FEATURES

Construction

- Heavy duty, die-cast aluminum housing with hinged door frame
- Fully seated silicone gasket provides a waterproof and bug-free lens

Electrical

- Operating voltage 120-277V
- Dimmable 0-10V
- 45W | 4050lms | 90lm/W
- 70W | 6300lms | 90lm/W
- Long-life LEDs and electrical driver
- 50,000 hour projected life
- Available in 80CRI
- Available in 4000K or 5000K
- Operating temperature: -31°F (-35°C) to 122°F (50°C)

Installation

- Wall mount
- Removable mounting bracket with built-in leveling bubble for easy, one-person installation

Lens

- Specially designed clear glass lens protects LEDs while creating optimum distribution and output

Finish

- Oil Rubbed Bronze finish

Dimensions

- 11" L x 6-3/4" W x 5-1/8" H

Certifications

- CSA-us
- 5 year limited warranty



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.

4429

120V-277V

Specification & Ordering

Model #	Dimensions (L x W x H)	Watts	Lumens
4429OB-45-5K	11" x 6-3/4" x 5-1/8"	45W	4050lms
4429OB-70-5K		70W	6300lms

Example: 4429OB-70-5K

Model #	CRI	Watts	CCT
4429OB	-80		
4429OB	-80 : 80 CRI	-45W : 45 W -70W : 70 W	-4K : 4000K -5K : 5000K

LED Non-Cutoff Wall Pack