


17 TLED Narrow Low-Profile Wrap



CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Low-profile wrap-around provides uniform downward light distribution and subtle side illumination
- Shallow depth provides sleek, low-profile appearance
- Diffuser is secured continuously along luminaire sides
- Mounts easily as a single fixture or in continuous row installations
- Wireway is accessible without the use of tools
- TLED fixtures provide on-site lamping flexibility and simple installation
- Made Right Here® in the USA



ORDERING EXAMPLE: 17 - 4 - 24T8LS/B - A - OPTIONS - UNV

ORDERING INFO

SERIES	NOMINAL LENGTH	TOTAL LAMPS	LAMP SIZE	WIRING	LAMP TYPE	SHIELDING
17	4 4' 8 8'	4' Fixtures 2 8' Fixtures 4 ⁽¹⁾	4T8L 4' T8 LED tube	S Single end ⁽²⁾ D Double end	B Type B	A Clear prismatic acrylic diffuser

OPTIONS⁽³⁾

GAT	T-bar fastener for 320 ceiling spacer
SS-12	Single stem & canopy, 12" ⁽⁴⁾
SWS-12	Stem & swivel canopy, 12" ⁽⁵⁾
VBV	(2) Y-hangers
VBV-2	(2) Y-hangers and (2) 2' chains

VOLTAGE

UNV 120-277V

SPECIFICATIONS

- HOUSING – 20-gauge die-formed C.R.S. End plates constructed of 19-gauge die-formed C.R.S.
- SHIELDING – Clear prismatic acrylic diffuser with 15% DR additive, .100" nominal thickness. Prismatic bottom/continuous wrap sides.
- FINISH – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others.
- MOUNTING – Surface or suspended.
- LISTINGS –
 - UL/CUL listed as LED surface luminaire suitable for dry or damp locations.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY – 5-year limited fixture warranty, see hew.com/warranty.

NOTES

- 2-lamp cross-section only.
- Due to differences in wiring of TLED lamps, samples of specified lamp must be provided at time of fixture order.
- See page 2 for MOUNTING DETAILS.


- Two stem sets required. One additional stem set required for each row mounted fixture.
- Two stem sets required. One additional stem set required for each row mounted fixture.



17 TLED

Narrow Low-Profile Wrap

BACK VIEW DETAILS

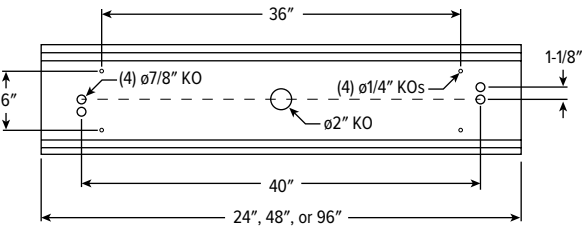

Note: Midsection punching for 4' and 8' units only.
8' unit consists of duplicate 4' unit punching.

MOUNTING DETAILS

