


SM050 Series

Einka

Illuminated Mirrors

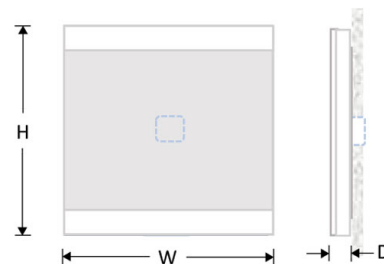

FEATURES

- 4" High Illuminated Bands
- Shallow 2-1/8" Depth
- Up to 48" x 96" Max Dimensions
- Forward Illumination w/ Ambient Glow

PART NUMBER

SM050_ - _ X _ - L930K - _

For Custom Dimensions, Consult Factory

Note: Dimension cannot exceed 48" x 96". Minimum Width of 24".

Einka Mirror

SM050 = Glass
SM050A = Acrylic

Height (in.)

30"
36"
40"

Width (in.)

24"
30"
36"
40"
48"
54"

Source

L930K (Standard)
Options:
L927K
L935K
L940K

Options

NL = Night Light (Separate Circuit)
NS = Night Light w/ Touch Switch
SD = Step Dimming via Touch Switch

For other options, consult factory.

SPECIFICATIONS

Housing: Post Powder Coated Heavy Ga. Paintlok™ Steel Housing for structural integrity, Aluminum LED bracketry for heat sinking

LED: 3000K, 90CRI, Constant Voltage. ~7W per linear foot of mirror perimeter.

Driver: Constant voltage 0-10V dimming driver, 120/277V. (Consult factory for other options.)

Mirror: 5MM glass w/polished edges. (Optional 3/16" silvered acrylic w/polished edges.)

Translucent Frost: Opalex coating process resists fingerprints on frosted panels.

Wiring: Hardwired connection for centrally located J-Box (by others).

www.ScottArchLighting.com | Tel (707) 864-2172 | Fax (707) 864-2182

© Copyright 2023 Scott Architectural Lighting. All Rights Reserved. Made in the USA.

