

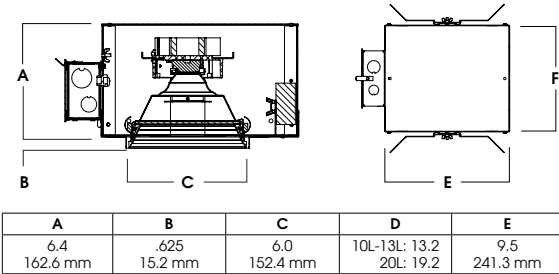


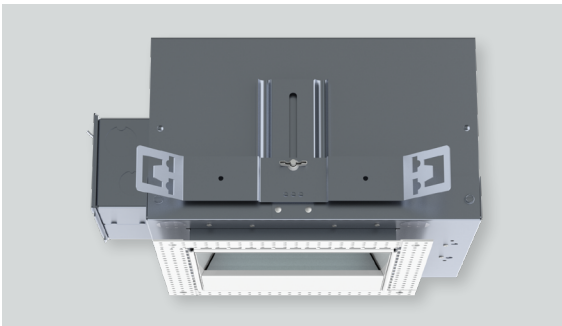

6" SQ. TRIMLESS IC WALL WASH

XT SERIES / 2000 LUMENS MAX

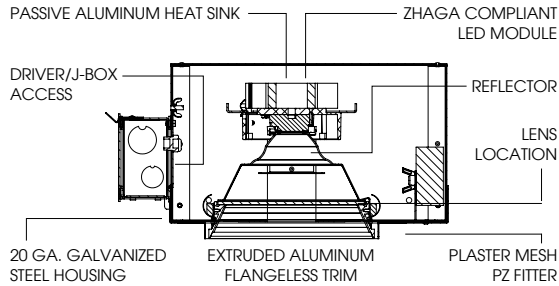

SWZI6XT - TRIMLESS / IC RATED

APPLICATION

Versatile 6" Square aperture recessed LED wall wash for Insulated Ceiling installations with flangeless trim and a wide range of lumens and control options.

FEATURES

Two-stage optical system for smooth light distribution and focus control. Quick change LED module with interchangeable optics for job site adjustment and fixture maintenance. Shallow plenum design. Tool-less driver and j-box access. Posi-lock trim retention torsion springs. Integral .625" collar with deep ceiling option for up to 2" thick ceiling (PR).

TRIM FINISH

A variety of architectural powdercoat colors are available. Plaster mesh fitter included.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Flangeless one piece trim extruded high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE

CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
SWZI6XT10L	SWZI6LEDXI15W	1000	480	11.1	43.2
SWZI6XT13L	SWZI6LEDXI20W	1300	647	15.0	43.1
SWZI6XT20L	SWZI6LEDXI33W	2000	996	23.7	42.0

SERIES	LUMENS ¹		CCT	OPTICS	DRIVER / DIMMING / VOLTAGE ³			OPTIONS ⁴		TRIM	FINISH		TRIM OPTIONS ¹⁰			
SWZI6XT	83 CRI			XW Extra Wide	E	Electronic Driver	1	120V	BH27 ⁵	27" Solid Bars	SW6NXT ⁷	MW ⁸	Matte White	SKX ⁽¹⁾	Linear Wall Wash Lens	
	10L	1000 Lm	27K		2700K	DS10	10% 0-10V	2	277V	H12		12" - 24" Expandable Bars	MB		Matte Black	
	13L	1300 Lm	30K		3000K	DO10	1% 0-10V			H06		6" - 12" Expandable Bars	PT	Platinum Silver	SKW	Linear Wall Wash Lens
	20L	2000 Lm	35K		3500K	DS2W1	1%, ELV/MLV, 120V			CB24		24" C-Channel Bars	OB	Oil Rubbed Bronze		Wet Location
			40K		4000K	DLTE1	1% Lutron® 2-Wire Forward Phase, 120V			EMRM		Remote Emergency Battery Pack	CH	Charcoal		
						DL3E	1% Lutron® EcoSystem®, Fade			FS		Fusing	AC	Anodic Champagne		
						EL10	1%, eldoLED			EB		Black Housing	AS	Anodic Sapphire		
						ED01	0.1%, eldoLED			CR		Corrosion Resistant	AM	Anodic Malachite		
						DALI	DALI Control			PR ⁶		Deep Ceiling Extension	SN	Sun Gold		
										GR		Goof Ring	CO	Copper Metallic		
98 CRI											GH	Graphite				
10L	1000 Lm	27HK	2700K								AMB	Anti Microbial Finish				
13L	1300 Lm	30HK	3000K								CC ⁹	Custom Color				
20L	2000 Lm	35HK	3500K													
		40HK	4000K													

EXAMPLE: SWZI6XT13L35KXWE1H12/SW6NXTMWSKX

NOTES:

1 Nominal Source Lumens at Any CCT 2 Nominal Delivered Lumens 83 CRI at Any CCT with XW-MW-SKX 3 Contact Factory for Additional Options 4 See Product Options Page for Details 5 Standard Bar Hangers 6 Contact Factory 7 "N" Indicates Flangeless Trim 8 Standard Finish 9 Contact Factory for Special Finishes 10 Contact factory for Special Lenses/Louvers 11 Standard Lens



PROJECT: _____

TYPE: _____

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

