

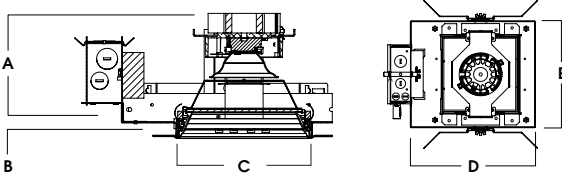


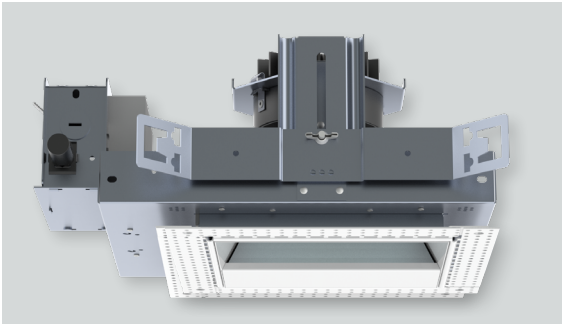

6" SQ. TRIMLESS WALL WASH XT SERIES / 5000 LUMENS MAX

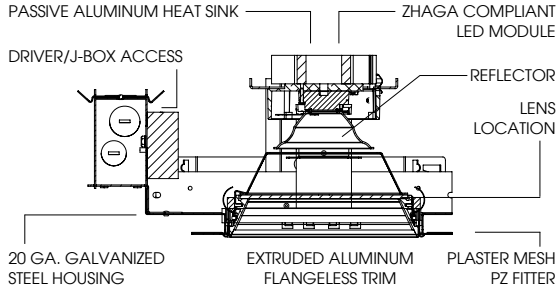

A	B	C	D	E
10L-20L: 5.6 30L-50L: 6.6	.625 15.2 mm	6.0 152.4 mm	13.2 335.3 mm	9.5 241.3 mm

SWZO6XT - TRIMLESS / NON-IC RATED

APPLICATION

Versatile 6" Square aperture recessed LED wall wash with flangeless trim and a wide range of lumens and control options.

FEATURES

Two-stage optical system for smooth light distribution and focus control. Quick change LED module with interchangeable optics for job site adjustment and fixture maintenance. Shallow plenum design. Tool-less driver and j-box access. Posi-lock trim retention torsion springs. Integral .625" collar with deep ceiling option for up to 2" thick ceiling (PR).

TRIM FINISH

A variety of architectural powdercoat colors are available. Plaster mesh filter included.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Flangeless one piece trim extruded high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE					
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
SWZO6XT10L	SWZO6LEDXI15W	1000	480	11.1	43.2
SWZO6XT13L	SWZO6LEDXI20W	1300	647	15.0	43.1
SWZO6XT20L	SWZO6LEDXI33W	2000	996	23.7	42.0
SWZO6XT30L	SWZO6LEDXI52W	3000	1493	34.6	43.1
SWZO6XT40L	N/A	4000	1916	39.9	48.0
SWZO6XT50L	N/A	5000	2489	54.0	46.1

SERIES	LUMENS ¹	CCT	OPTICS	DRIVER / DIMMING / VOLTAGE ³			OPTIONS ⁶		TRIM	FINISH		TRIM OPTIONS ¹²				
SWZO6XT	83 CRI		XW Extra Wide	E	Electronic Driver	1	120V	BH27 ⁷	27" Solid Bars	SW6NXT ⁹	MW ¹⁰	Matte White	SKX ¹³	Linear Wall Wash Lens		
	10L	1000 Lm		27K	2700K	DS10	10% 0-10V	2	277V		H12	12" - 24" Expandable Bars		MB	Matte Black	SKW
	13L	1300 Lm		30K	3000K	DO10	1% 0-10V				H06	6" - 12" Expandable Bars	PT	Platinum Silver		
	20L	2000 Lm		35K	3500K	DS2W1	1%, ELV/MLV, 120V				CB24	24" C-Channel Bars	OB	Oil Rubbed Bronze		
	30L	3000 Lm		40K	4000K	DLTE1 ⁴	1% Lutron® 2-Wire Forward Phase, 120V				EM	Integral Emergency Battery	CH	Charcoal		
	40L	4000 Lm				DL3E ⁴	1% Lutron® EcoSystem®, Fade				FS	Fusing	AC	Anodic Champagne		
	50L	5000 Lm				EL10	1%, eldoLED				EB	Black Housing	AS	Anodic Sapphire		
	98 CRI					ED01	0.1%, eldoLED				CR	Corrosion Resistant	AM	Anodic Malachite		
	10L	1000 Lm		27HK	2700K	DALI	DALI Control				PR ⁸	Deep Ceiling Extension	SN	Sun Gold		
	13L	1300 Lm		30HK	3000K	DMXS ⁵	DMX Standard Configuration				GR	Goof Ring	CO	Copper Metallic		
	20L	2000 Lm		35HK	3500K	DMXC ⁵	DMX Non-Standard Custom				AMB	Anti Microbial Finish	GH	Graphite		
	30L	3000 Lm		40HK	4000K						WDFI	Fitter for Wood Ceiling	AMB	Anti Microbial Finish		
										CC ¹¹	Custom Color					

EXAMPLE: SWZO6XT10L35KXWE1H12/SW6NXTMWSKX

NOTES:

1 Nominal Source Lumens at Any CCT 2 Nominal Delivered Lumens 83 CRI at Any CCT with XW-MW-SKX 3 Contact Factory for Additional Options 4 50L Not Available with Lutron Drivers 5 Contact Factory 6 See Product Options Page for Details 7 Standard Bar Hangers 8 Contact Factory 9 "N" Indicates Flangeless Trim 10 Standard Finish 11 Contact Factory for Special Finishes 12 Contact factory for Special Lenses/Louvers 13 Standard Lens



PROJECT: _____

TYPE: _____

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

