



PENDANT / SURFACE SEMI-DIRECT EVENLIGHT SERIES

specline
linear



EV04IND24OL, EV04IND48OL

APPLICATION

Evenlight is a 4" wide linear pendant, wall or surface mount for semi-direct illumination.

FEATURES

Small rectilinear profile for pendant or surface mount applications. LED module and driver are accessible from below for future replacement.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for available finishes. Matte White, Matte Black and Platinum Silver are standard.

ELECTRONICS

LED module features high brightness white Osram LEDs. 3-step MacAdam Ellipse binning with CRI 84 typical. Variety of electronic 120V/277V and dimming drivers available.

CONSTRUCTION


20ga. steel formed housing. High efficiency snap in acrylic lens. 3/16" flush machined aluminum end caps included.

OPTICS

Extruded acrylic diffuser features smooth sides providing 90% direct, 10% indirect illumination.

CODE COMPLIANCE

BAA Compliant. ETL Certified to meet US and Canadian Standards, suitable for dry or damp locations. Manufactured and tested to UL standards 1598/8750.



SERIES	A	B	C
EV04IND24OL	4.6	3.8	24.0
EV04IND48OL	4.6	3.8	48.0

WATTAGE / LUMENS DATA / PER FOOT

PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
EV04IND48OL05L	2000	1835	16.0	115
EV04IND48OL07L	2800	2582	21.4	121
EV04IND48OL10L	4000	3737	33.0	113
EV04IND48OL13L	5200	4621	40.2	115
EV04IND48OL20L	8000	6795	61.2	111

SERIES	LUMENS ¹	CCT	DRIVER / VOLTAGE	LENS	MOUNTING ⁴	OPTIONS	FINISH
EV04IND24OL	05L 500 Lm/Ft	30K ³ 3000K	EX Electronic Driver, 120V/277V	DW Diffuse White	PM ⁵ Rigid Pendant Mount	FS Fuse	MW ⁷ Matte White
EV04IND48OL	07L 700 Lm/Ft	35K 3500K	DS10X 10%, 0-10V		HM ⁵ Hang Straight		MB ⁷ Matte Black
	10L 1000 Lm/Ft	40K 4000K	DO10X 1%, 0-10V		CHN ⁵ Chain and Cord		PT ⁷ Platinum Silver
	13L 1300 Lm/Ft		DS2W1 1%, ELV/MLV, 120V		CD ⁵ Cord and Cable Mount		TW Textured White
	20L 2000 Lm/Ft				SM ⁵ Surface Mount		TB Textured Black
							MT Textured Silver
							BZ Bronze
							OB Oil Rubbed Bronze
							CH Charcoal
							GH Graphite
							AC Champagne
							SN Sun Gold
							BR Brecchia Rust
							AN Anodic Natural
							CO Copper Metallic
							CC ⁸ Custom Color

EXAMPLE: EV04IND24OL10L35KD010XDWCDD36MW

NOTES:

1 Total Nominal Source Lumens 2 Nominal Delivered Lumens at 3500K 3 13L Max 4 See Mounting Pages for Options and Details on Components and Finishes
5 Specify Length in Inches; See Mounting Page for Availab 6 May Be Ceiling or Wall Mount 7 Standard Finishes 8 See Color Page for More Options/Consult Factory for Special Finishes



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



PROJECT:	TYPE:
CAT. NO.:	



PENDANT / SURFACE SEMI-DIRECT


EVENLIGHT SERIES / FIXTURE OPTIONS

specline
linear




SERIES SIZES

EV04IND24OL



A	B
24.0	4.0
609.6 mm	101.6 mm


EV04IND48OL

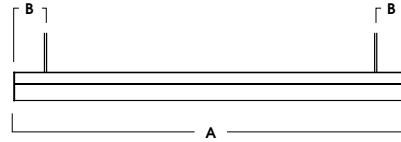


A	B
48.0	4.0
1219.2 mm	101.6 mm

MOUNTING TYPES


HM / PM
HANG STRAIGHT / RIGID PENDANT

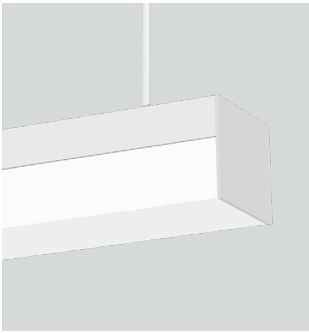


CHN
CHAIN AND CORD

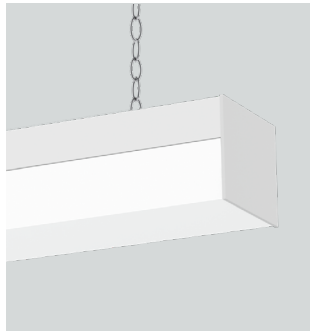

CD
CORD / CABLE MOUNT

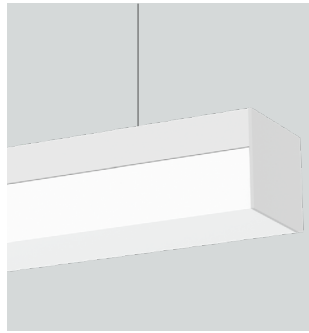


SM / WM
SURFACE MOUNT / WALL MOUNT




STANDARD FINISHES

MW
MATTE WHITE



MB
MATTE BLACK



PT
PLATINUM SILVER

