
FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector is available with 15° Spot, 25° Narrow Flood or 40° Flood Beam angle.
- ✓ Available with optional flat frame plate for NC installation.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Round adjustable trim can rotate 350° or tilted up to 30°.
- ✓ LED spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight
SPECIFICATION:
ED AR+

SOURCE	VOLTAGE	DRIVER	MOUNTING	REFLECTOR	TRIM	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

SOURCE

- 8W LED
- 12W LED

VOLTAGE

- 120V
- 277V
- 347V*

*External step down transformer per luminaire.

DRIVER

- ST - Standard
- DL - 0-10V Dimming
- DT - TRIAC
- *

*Please specify dimming method.

MOUNTING

- RT -Retrofit
- NC- New Const. Plate

REFLECTOR

- SP - Spot
- NF - Narrow Flood
- FL - Flood

TRIM


- 01
- 02
- 03
- 04
- 05
- 06



- 07
- 08
- 09
- 10
- 11

CCT


- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

*Other options are available.

OPTIONS

- No Options*
- 90 CRI

*Leave Empty.

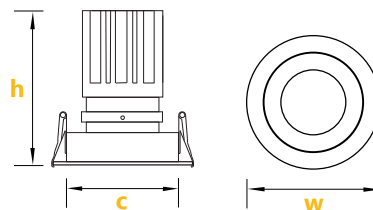
DIMENSIONS:

Height	Width	Cut Out
3.625"	3.36"	2.937"


LUMEN OUTPUT:

Watts	30K	35K	40K
8W	700 lm	720 lm	740 lm
12W	1050 lm	1080 lm	1110 lm

Project:

Type:

DRIVER BOX:

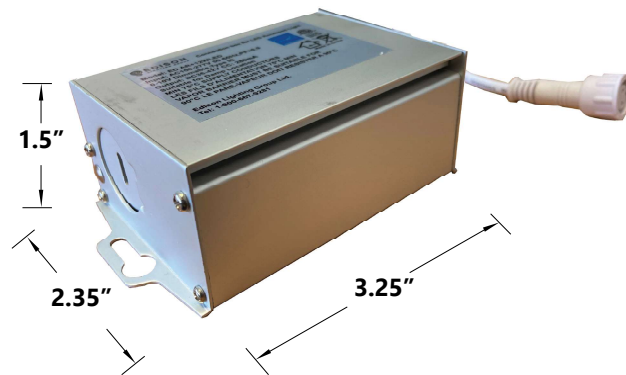

NC PLATE:

