

**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for surface mounted installations.
- ✓ LED Spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

ED CUBIX+  x  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

**TYPE**

- 1-Single
- 2-Double
- 3-Triple

**SOURCE**

- 10W LED
- 15W LED

**VOLTAGE**

- 120V
  - 277V
  - 347V\*
- \* External step down transformer per luminaire.

**DRIVER**

- ST - Standard
  - DL - 0-10V Dimming
  - DT - TRIAC
  - \*
- \* Please specify dimming method.

**MOUNTING**

- SF - Surface Mount

**LOUVER**

- WH - White
- BK - Black
- SL - Silver
- GL - Gold
- RG - Rose Gold

**FINISH**

- WH - White
- BK - Black
- GR - Grey

**CCT**

- 30K - 3000Kelvin
  - 35K - 3500Kelvin
  - 40K - 4000Kelvin
- \*Other options are available.

**OPTIONS**


- No Options\*
  - 90 CRI
  - CB - Casambi BT
- \*Leave Empty.  
\*\*Combination example (90CRI/CB).

**DIMENSIONS:**

Unit	Length	Height	Width
Single	3.750"	4.500"	3.750"
Double	7.375"	4.500"	3.750"
Triple	10.937"	4.500"	3.750"

**LUMEN OUTPUT:**

Watts	30K	35K	40K
10W	930 lm	950 lm	970 lm
15W	1395 lm	1425 lm	1450 lm

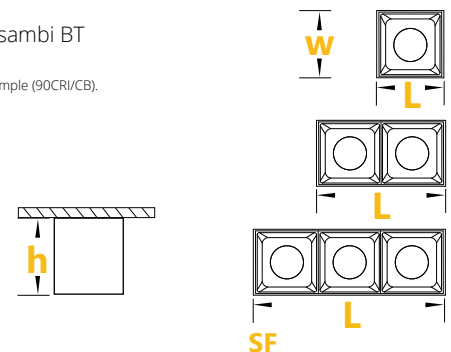

Project:

Type: