
FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure. Suitable for suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight
SPECIFICATION:

ED CURVE+ - - - - - - - - - -

Enter the Product Code into the boxes above.

SIZE

- 40 Inch
- 50 Inch

SOURCE

- 20WLED
- 30WLED
- 40WLED*

*Available for 50Inch-Uneven Distribution only.

RADIANCE

- DD - Direct (100%Down)
- ID - Indirect (100%Up)**
- UD - Uneven(70%Down/30%Up)**

 *Light Distribution.
 **Suspended Configuration only.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- *

* Please specify dimming method (ELV).

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- WM - Wall Mount
- SF - Surface Mount

*Please specify required Length.

LENS

- OP - Opal

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#
- VD - Vinyl Decal*

* Please provide 600dpi Image.

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White** (2700K-6500K)

 *Other options are available.
 **Available with Dali controls.

OPTIONS

- No Options*
- 90 CRI
- DS-Daylight Sensor
- DC - Dual Circuit**
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

 *Leave Empty.
 **Down /Up Control separately.
 ***Combination example (90CRI/DS).



LUMEN OUTPUT:

Watts	30K	35K	40K
20W	2070 lm	2125 lm	2180 lm
30W	3065 lm	3150 lm	3235 lm
40W	4086 lm	4200 lm	4313 lm

Project:

Type:

SIZE:

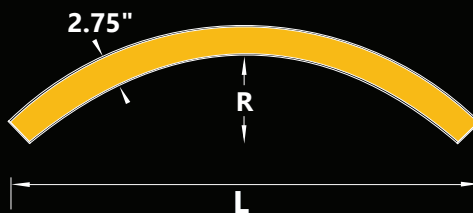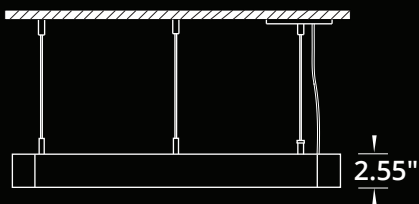

Length	Radius
40 Inch	30 Inch
50 Inch	35 Inch

RADIANCE:

DIRECT DISTRIBUTION




UNEVEN DISTRIBUTION




MOUNTING:




SURFACE MOUNT

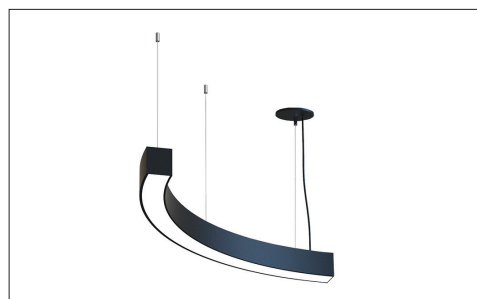

SUSPENDED

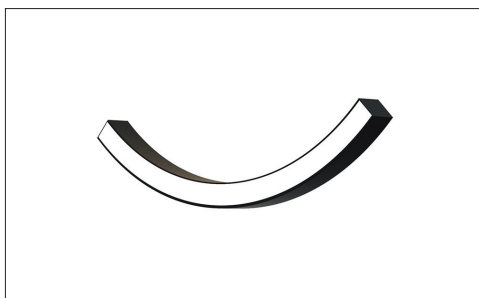

WALL MOUNT

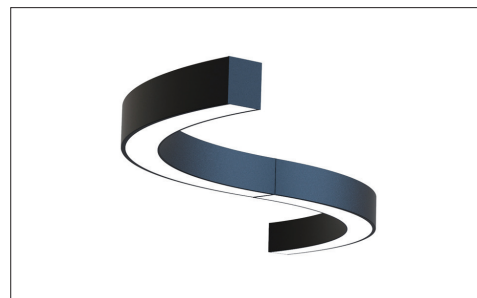

CUSTOM - INFINITY