



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency opal inserted or optional low glare microprismatic lens.
- ✓ Suitable for suspended and row mounted installations.
- ✓ Fixture body with integrated driver is made from light weight steel.
- ✓ Available with matt white, black or grey finish.
- ✓ LED Strips are rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial applications.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:


Enter the Product Code into the boxes above.

SOURCE

- 35W LED
- 45W LED

RADIANCE

- DD - Direct (100%Down) *Light Distribution.

VOLTAGE

- 120V
 - 277V
 - 347V*
- *Not available for all configurations.

DRIVER

- ST - Standard
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - *
- * Please specify dimming method (ELV).

MOUNTING

- S4-Suspension 4Feet
 - S6-Suspension 6Feet
 - S Feet*
 - SF - Surface Mount
- *Please specify required Length.

LENS

- OP - Opal
- PR - Prismatic

FINISH

- WH - White
- BK - Black
- GR - Grey

CCT

- 30K - 3000Kelvin
 - 35K - 3500Kelvin
 - 40K - 4000Kelvin
 - TW - Tunable White** (2700K-6500K)
- *Other options are available.
**Available with Dali controls.

OPTIONS


- No Options*
 - 90 CRI
 - DS-Daylight Sensor
 - DC - Dual Circuit**
 - OS - Occupancy Sensor
 - DOS - Daylight & Occupancy Sensor
- *Leave Empty.
**Down /Up Control separately.
***Combination example (90CRI/DS).

DIMENSIONS:

Length	Width	Depth
47.25"	7.125"	2.250"

LUMEN OUTPUT:

Watts	30K	35K	40K
35W	3420lm	3500 lm	3580 lm
45W	4400 lm	4500 lm	4600 lm

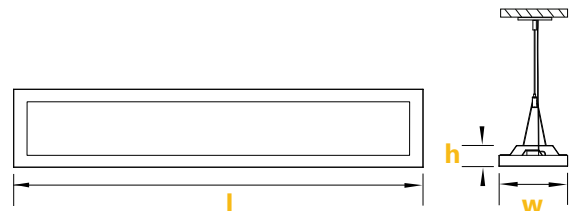

Project: _____

Type: _____