
FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED 5.5" board.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure.
- ✓ Suitable for suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight
SPECIFICATION:
ED RING+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS

Enter the Product Code into the boxes above.

SIZE

- 2 Feet
- 3 Feet
- 4 Feet
- 5 Feet

SOURCE

- 25WLED
- 50WLED
- 75WLED*

 *Available for 4 & 5 Feet.
 **Other Wattages are available.

RADIANCE

- DD - Direct (100%Down)
- ID - Indirect (100%Up)**
- UD - Uneven(70%Down/30%Up)**

 *Light Distribution.
 **Suspended Configuration only.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- *

* Please specify dimming method (ELV).

MOUNTING

- C4-Canopy 4Feet
- C6-Canopy 6Feet
- C Feet*
- S4-Suspension 4Feet**
- S6-Suspension 6Feet**
- S Feet*
- WM - Wall Mount**
- SF - Surface Mount**

 *Please specify required Length.
 **Remote Driver.

LENS

- OP - Opal

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#
- VD - Vinyl Decal*

* Please provide 600dpi Image.

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White** (2700K-6500K)

 *Other options are available.
 **Available with Dali controls.

OPTIONS

- No Options*
- 90 CRI
- DS-Daylight Sensor
- DC - Dual Circuit**
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

 *Leave Empty.
 **Down /Up Control separately.
 ***Combination example (90CRI/DS).



LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6610 lm	6750 lm	6890 lm

Project:

Type:

SIZE:

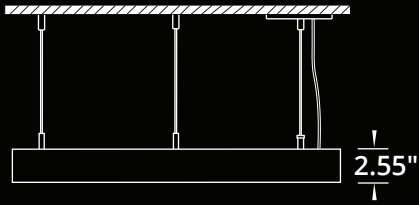

Size	Diameter
2 Feet	23.60 Inch
3 Feet	35.40 Inch
4 Feet	47.20 Inch
5 Feet	59.00 Inch

RADIANCE:

DIRECT DISTRIBUTION



UNEVEN DISTRIBUTION



MOUNTING:



SUSPENDED - CEILING CANOPY




SUSPENDED - STRAIGHT WIRE*

*Remote Driver.



SURFACE MOUNT*

*Remote Driver.

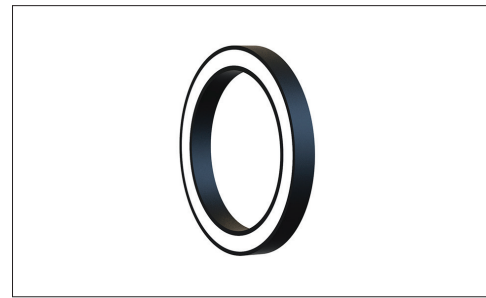

WALL MOUNT*

*Remote Driver.