



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution with 40° Beam.
- ✓ Circular internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for surface mounted and suspended installations.
- ✓ LED Spot is rated for 60,000hrs. L70 with 90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED TUBE+ SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LOUVER — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

SOURCE

- 15W LED
- 20W LED
- 25W LED

RADIANCE

- DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

- 120V
- 277V

DRIVER

- ST - Standard
 - DL - 0-10V Dimming
 - DT - TRIAC
 - *
- * Please specify dimming method.

MOUNTING

- SF - Surface Mount
 - S4 - Suspension 4Feet
 - S6 - Suspension 6Feet
 - S Feet*
 - R2 - Rod 2Feet
 - R3 - Rod 3Feet
 - R Feet*
- * Please specify required Length.

LOUVER

- WH - White
- BK - Black
- SL - Silver

FINISH

- WH - White
- BK - Black
- GR - Grey

CCT

- 30K - 3000Kelvin
 - 35K - 3500Kelvin
 - 40K - 4000Kelvin
- *Other options are available.

OPTIONS


- No Options*
 - CB - Casambi BT
- *Leave Empty.

DIMENSIONS:

Width	Height
4.5"	6.0"

LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm

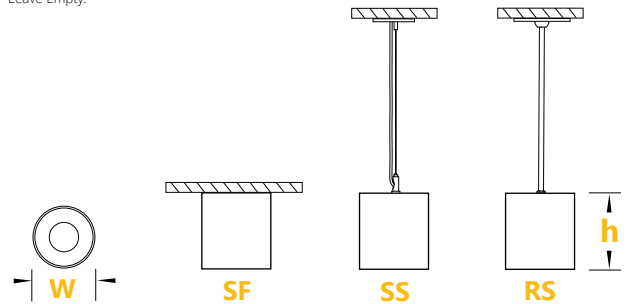

Project:

Type: