

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and damp area installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

SIZE
 _____ Feet

- SOURCE**
- 5W/Ft LED
 - 7W/Ft LED
 - 10W/Ft LED

- RADIANCE**
- DD - Direct (100%Down)
 - ID - Indirect (100%Up)**
 - UD - Uneven(70%Down/30%Up)**
- *Light Distribution.
**Not suitable for Surface Mount Configuration only.

- VOLTAGE**
- 120V
 - 277V
 - 347V*
- *Not available for all configurations.

- DRIVER**
- ST - Standard
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - *
 - EC - Emergency Circuit
 - EM - Emergency**
- * Please specify dimming method (ELV).
**Battery Pack per 4Feet section.

- MOUNTING**
- S4-Suspension 4Feet
 - S6-Suspension 6Feet
 - S Feet*
 - WM - Wall Mount
 - WF - Wall Flush
 - SF - Surface Mount
 - RT - Recessed Trimless
- *Please specify required Length.

- LENS**
- OP - Opal
 - PR - Prismatic
 - BL - Black Lens
 - AR - Aluminum Reflector*
- * Available for 4Feet only.

- FINISH**
- WH - White
 - BK - Black
 - GR - Grey
 - CF - Custom RAL#
 - VD - Vinyl Decal*
- * Please provide 600dpi Image.

- CCT**
- 30K - 3000Kelvin
 - 35K - 3500Kelvin
 - 40K - 4000Kelvin
 - TW - Tunable White** (2700K-6500K)
- *Other options are available.
**Available with Dali controls.

- OPTIONS**
- No Options*
 - 90 CRI
 - DR - Damp Rated
 - DS - Daylight Sensor
 - DC - Dual Circuit**
 - OS - Occupancy Sensor
 - DOS - Daylight & Occupancy Sensor
- *Leave Empty.
**Down /Up Control separately.
***Combination example (90CRI/DS).

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm

Project:

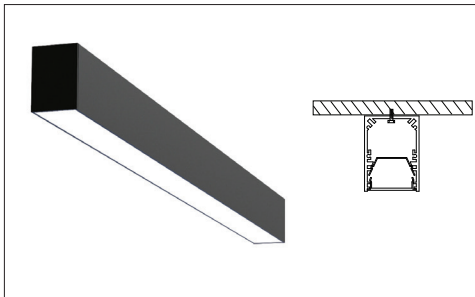
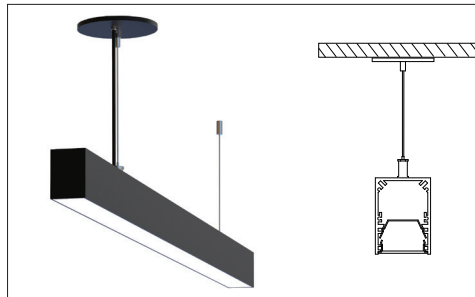
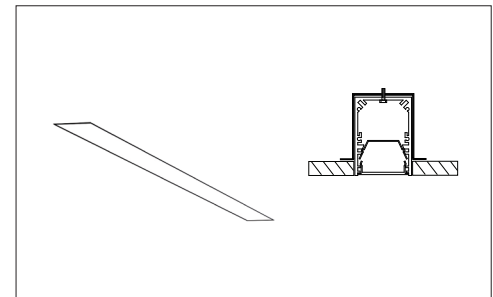
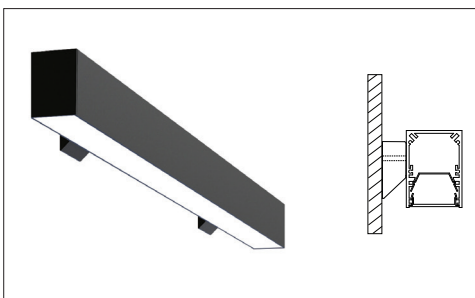
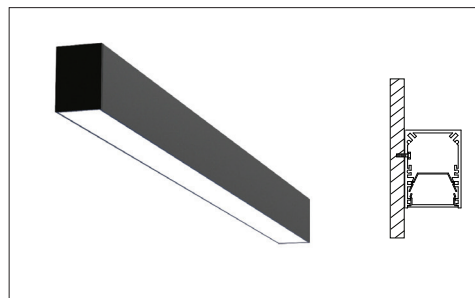
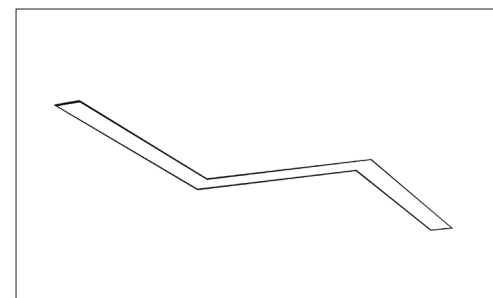
Type:

SIZE:


Size	L (LENGTH)
1 Feet	11.813 Inch
2 Feet	24.563 Inch
3 Feet	35.563 Inch
4 Feet	48.313 Inch
5 Feet	59.313 Inch
6 Feet	72.063 Inch
7 Feet	83.063 Inch
8 Feet	95.813 Inch

RADIANCE:
DIRECT DISTRIBUTION

UNEVEN DISTRIBUTION

MOUNTING:

SURFACE MOUNT

SUSPENDED

RECESSED TRIMLESS

WALL MOUNT

WALL FLUSH

90° LEFT/90° RIGHT